



Martec offers

genuine quality that pursues

Safety - Labor Efficiency - Convenience

In 1974 a section of the Kobe based ship inspection company Marine Enterprise Co. Ltd. was incorporated as an independent company – Martec K.K. We tied business relations with companies in several European countries and in 1978 became the sole agent for lifting products from Swedish manufacturer Gunnebo Industries.

We have a sales track record in Japan for over 40 years, and currently handle **more than 200 different items** of lifting equipment – mainly Gunnebo-made products – with load capacities ranging from 0.75 to 125 tons. With superior products from Japan and overseas, we meet the various lifting needs of our customers.

We also focus on developing our own products, which we manufacture and sell under strict in-house standards. This dedicated manufacturing ("monozukuri" in Japanese) has been recognized, with our products being approved as safety-relevant parts by major construction machinery manufacturers. We steadily built up our reputation as a reliable lifting equipment manufacturer.

Currently, we have relationships with customers from a wide range of industries, including the construction machinery manufacturers mentioned above, major general contractors, precast concrete manufacturers, manufacturing plants for automobiles and other transportation-related equipment, steel manufacturers, thermal and wind power plants.

Our work does not end with the manufacture and sale of lifting equipment.

Upon request, **we also inspect lifting equipment and provide safety training for workers.**

This is also because we prioritize the safety of our customers at lifting work sites.

Martec will continue to contribute in various ways to **Safety - Labor Efficiency - Convenience** at our customers' production sites.



Examples of our in-house equipment

Destructive measurement

- Amsler tensile testing machine

Non-destructive measurement

- Rockwell hardness tester
- Magnetic flaw detector
- Ultrasonic inspection machine




Amsler tensile testing machine



Rockwell hardness tester

INDEX

| | | | |
|--|--------------|--|--|
| Our High-end Lifting Products | 4-5 | | |
| Selecting a Suitable Chain Sling | 6-7 | | |
| Chain Sling Sets | 8-13 |  | |
| "Sling Master" and "Sling Expert" | 14 |  | |
| Chan Sling Accessories | 15-26 | | |
| Chain | 15 |  | |
| Master Links | 15-17 |  | |
| Couplings | 18-20 |  | |
| Hooks | 21-25 |  | |
| Other Accessories | 25-26 |  | |
| Special Purpose Hooks | 26 |  | |
| Insulated Hooks | 27 |  | |
| SK System | 28-29 |  | |
| Spare Parts | 30 | | |
| Safety Precautions | 31 | | |
| Product Inspection | 32 | | |
| Excavator Hooks | 33 |  | |
| Special Lifting Products | 34-35 |  | |

For videos about high-end lifting products,
please check out our YouTube channel.

www.youtube.com/@MartecLiftingEquipment



Born from Unique Ideas, Rational Design, and Excellent Material

Contributing to Safety

Thorough Production Management




Forging



Blasting



Powder Coating

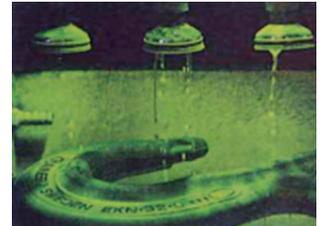

Magnetic Particle Testing

Gunnebo's lifting products are manufactured using Swedish steel, which is considered to be the strongest steel. Therefore they are highly durable and resistant to wear. The KLA chain is world top class in elongation – the Japanese JIS standard stipulates that the total elongation at break is 20% or more.


Gunnebo also thoroughly controls the production process from raw materials to the final product. They have their own production facilities for each product, such as chains, hooks, and master links, and only products that have passed a series of tests and are guaranteed to be safe are shipped out.

Examples of tests applied

Automatic forging quality test // Calibration test // Chain bending and elongation test
 Breaking force measurement test // Magnetic particle test // Proof load test


Traceability

Our awareness of safety remains, even after products have been shipped. All items are marked with the manufacturer's name, product size, grade, and batch number. This makes it possible to trace all products back to the raw materials, determining when and where they were manufactured.

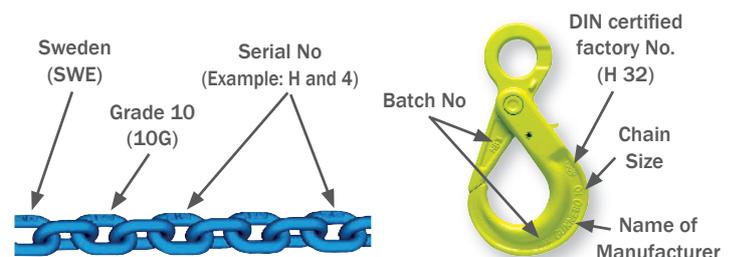

Griplatch Hook (OBK)


Safety also comes from unique ideas and rational design. For example, the OBK Griplatch Hook is the next generation of the first safety hook with locking function (BK type) that had been developed to improve latch-type hooks, which involve the risk of wire falling off. Thanks to its special interlocking latch, the OBK provides excellent safety, allowing workers to be aware of the danger of overload in advance. Our evolution never stops in our pursuit to improve safety.

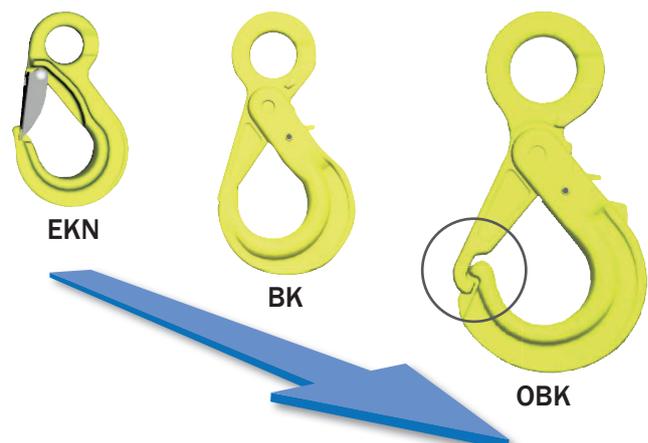

[See product details on page 21.](#)

Born from Unique Ideas, Rational Design, and Excellent Material Contributing to Labor Efficiency and Convenience

Shortening Function

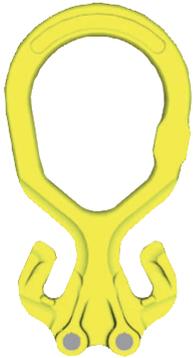

MGD



CGD



MIG

One main feature of the lifting equipment Martec provides, is its rational, original design, born from unique ideas. Particularly noteworthy are the master links (MG, MGD) and couplings (CG, CGD) with integrated chain shortening function.

Additional length adjustment components become unnecessary! **Lifting tasks with any desired lifting height** can be performed easily on the spot, and a reduced number of parts consequently means **less weight and costs**.

The functionality of this design, which can't be found with other companies, is state of the art forging.

See product details on pages 15, 16, 18, 25.



1




2



3

Easy chain length adjustment

Just hang the chain on the shortening pocket. No reduction of the working load limit (lifting angle within 90 degrees).

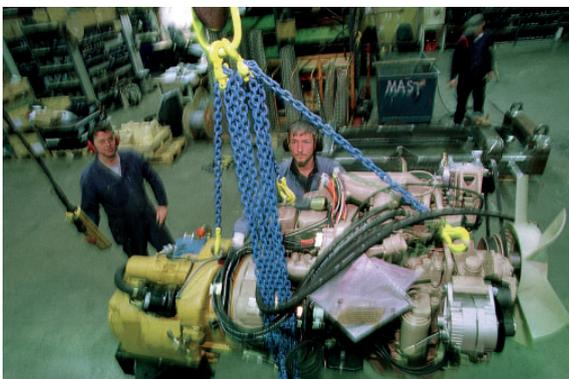

The shortening function allows flexible handling even of unevenly weighted (asymmetric) loads on the spot. No special lifting equipment is required!



Chain sets with shortening can also be used for hoisting (see photo left) – opening up a wide range of possible applications!

Step 1: Determine the lifting conditions

At first, confirm the weight of the load (or the maximum load limit of the crane). Then determine the appropriate lifting method (one-leg, two-leg, three- or four-leg, choke, basket lifting) and the lifting angle.



Step 2: Determine the chain diameter

Select the chain diameter that best meets the lifting conditions determined in step 1.

See WLL table on page 7.



Step 3: Select the right hook type

Choose a hook from our lineup on pages 21 to 25 (safety hook, swivel hook, clevis type, etc.) which best meets the requirements of the lifting task.

See also our chain sling sets on pages 9 to 14.



Step 4: Select a master link

Choose a master link from our lineup on pages 15 to 17 (with shortening function, for large cranes, etc.) which best suits the lifting method and the chain diameter.

See also our chain sling sets on pages 9 to 14.



If you have difficulties choosing the right sling, please contact us.

Working Load Limits depending on Lifting Method Safety factor 4:1

| Lifting Method | 1-leg | 2-leg | | | 3-leg / 4-leg | | |
|---------------------|--|-------|------|------|---------------|------|------|
| | | | | | | | |
| Lifting Angle (α) | - | 60° | 90° | 120° | 60° | 90° | 120° |
| Mode Coefficient | 1.0 | 1.73 | 1.41 | 1.0 | 2.59 | 2.12 | 1.5 |
| Chain Diameter (mm) | Working Load Limit (WLL) of Chain (Grade 10) (t) | | | | | | |
| 6 | 1.5 | 2.5 | 2.1 | 1.5 | 3.8 | 3.1 | 2.2 |
| 8 | 2.6 | 4.5 | 3.6 | 2.6 | 6.7 | 5.5 | 3.9 |
| 10 | 4.0 | 6.9 | 5.6 | 4.0 | 10.3 | 8.4 | 6.0 |
| 13 | 6.8 | 11.7 | 9.6 | 6.8 | 17.6 | 14.4 | 10.2 |
| 16 | 10.0 | 17.3 | 14.1 | 10.0 | 25.9 | 21.2 | 15.0 |
| 20 | 16.0 | 27.7 | 22.6 | 16.0 | 41.5 | 33.9 | 24.0 |
| 22 | 20.0 | 34.6 | 28.2 | 20.0 | 51.9 | 42.4 | 30.0 |
| 26 | 27.0 | 46.7 | 38.1 | 27.0 | 70.1 | 57.2 | 40.5 |
| 32 | 40.0 | 69.2 | 56.5 | 40.0 | 103.9 | 84.8 | 60.0 |

| Lifting Method | 1-leg Choke | 2-leg Choke | | | 1-leg 2-point Basket | | |
|---------------------|--|-------------|------|------|----------------------|------|------|
| | | | | | | | |
| Lifting Angle (α) | - | 60° | 90° | 120° | 60° | 90° | 120° |
| Mode Coefficient | 0.8 | 1.4 | 1.1 | 0.8 | 1.4 | 1.1 | 0.8 |
| Chain Diameter (mm) | Working Load Limit (WLL) of Chain (Grade 10) (t) | | | | | | |
| 6 | 1.2 | 2.0 | 1.6 | 1.2 | 2.0 | 1.6 | 1.2 |
| 8 | 2.0 | 3.6 | 2.9 | 2.0 | 3.6 | 2.9 | 2.0 |
| 10 | 3.2 | 5.5 | 4.5 | 3.2 | 5.5 | 4.5 | 3.2 |
| 13 | 5.4 | 9.4 | 7.6 | 5.4 | 9.4 | 7.6 | 5.4 |
| 16 | 8.0 | 14.0 | 11.0 | 8.0 | 14.0 | 11.0 | 8.0 |
| 20 | 12.8 | 22.1 | 18.1 | 12.8 | 22.1 | 18.1 | 12.8 |
| 22 | 16.0 | 27.7 | 22.6 | 16.0 | 27.7 | 22.6 | 16.0 |
| 26 | 21.6 | 37.4 | 30.5 | 21.6 | 37.4 | 30.5 | 21.6 |
| 32 | 32.0 | 55.4 | 45.2 | 32.0 | 55.4 | 45.2 | 32.0 |

| Lifting Method | 2-leg 4-point Basket | | |
|---------------------|--|------|------|
| | | | |
| Lifting Angle (α) | 60° | 90° | 120° |
| Mode Coefficient | 2.1 | 1.7 | 1.2 |
| Chain Diameter (mm) | Working Load Limit (WLL) of Chain (Grade 10) (t) | | |
| 6 | 3.1 | 2.5 | 1.8 |
| 8 | 5.4 | 4.4 | 3.1 |
| 10 | 8.3 | 6.7 | 4.8 |
| 13 | 14.1 | 11.5 | 8.1 |
| 16 | 21.0 | 17.0 | 12.0 |
| 20 | 33.2 | 27.1 | 19.2 |
| 22 | 41.5 | 33.9 | 24.0 |
| 26 | 56.1 | 45.8 | 32.4 |
| 32 | 83.1 | 67.8 | 48.0 |

JIS B 8816 Appendix 2

Chain Sling Working Load Limit
Mode Coefficient (M) Calculation Method

2-leg lifting: $M = 2 \times \cos \beta$

3-leg and 4-leg lifting: $M = 3 \times \cos \beta$

3-leg lifting 4-leg lifting

* The above working load limits are based on the condition that the center of gravity is not biased and the load is evenly distributed on each sling. When using two or more chain slings to lift unbalanced (asymmetric) load by adjusting the chain length, refer to the WLL values for 1-leg lifting.

Definition of Chain Sling Set Codes

Component

Master Link

| | | | | |
|------|----|-----|--------|-----|
| | | | | |
| Name | MG | MGD | MFA/MF | MFX |
| Code | MG | | T | X |

Coupling

| | | | | |
|------|---|--------|--------|----|
| | - | | | |
| Name | - | CG/CGD | CL/CLD | GA |
| Code | | G | L | A |

Chain

* Number of legs

| | | | | |
|------|---|---|---|---|
| | | | | |
| Code | 1 | 2 | 3 | 4 |

Hook


* In addition to these examples we have a large variation of hooks available.

| | | | | |
|------|----|-----|-----|----|
| | | | | |
| Name | BK | BKL | OKE | CL |
| Code | BK | BKL | OKE | CL |

Example:



MG1-BK

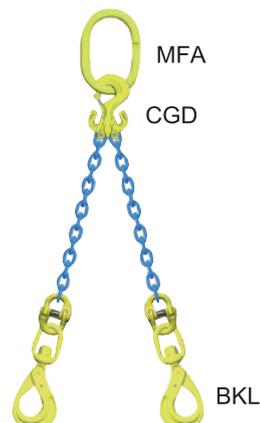

TG2-BKL

Sets Including Master Link with Shortening Function

Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C

1-leg Sets

When choke lifting, working load limits (WLL) are 80% of the values shown in below table.




MG1-BK



MG1-BKL



MG1-EKN



MG1-OKE




MG1-GBK



MG1-EGKNA



MG1-GGA
(for choke lifts)




MG1-BMS
(for steel plates)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | | | | Master Link MG |
|---------|---------------------|---------------------------|----------|---------|---------|---------|---------|-----------|---------|---------|----------------|
| | | | MG1-BK | MG1-BKL | MG1-EKN | MG1-OKE | MG1-GBK | MG1-EGKNA | MG1-GGA | MG1-BMS | |
| 1.5 | 6 | Master Link B | 60 | | | - | 60 | | | - | |
| | | Set Weight | 2.1 | 2.2 | 2.0 | - | 1.9 | 1.9 | 1.8 | - | |
| 2.6 | 8 | Master Link B | 60 | | | | | | | | - |
| | | Set Weight | 3.6 | 3.9 | 3.3 | 3.5 | 3.4 | 3.1 | 3.1 | - | |
| 4.0* | 10 | Master Link B | 75 | | | | | | | | - |
| | | Set Weight | 6.2 | 6.5 | 5.7 | 6.1 | 5.7 | 5.6 | 5.6 | 8.4 | |
| 6.8 | 13 | Master Link B | 90 | | | | | | | | - |
| | | Set Weight | 10.9 | 11.6 | 10.3 | 10.7 | 10.3 | 9.9 | 9.6 | - | |
| 10.0 | 16 | Master Link B | 105 | | | | | | | | - |
| | | Set Weight | 17.9 | 19.1 | 16.4 | 17.3 | 16.4 | 15.8 | 15.7 | - | |


* MG1-BMS = 3.0t

2-leg Sets


When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

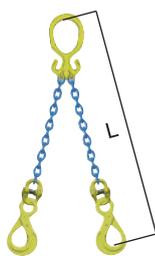


MG2-BK

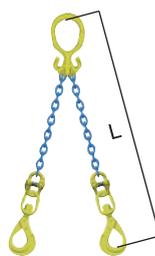


MG2-BKL

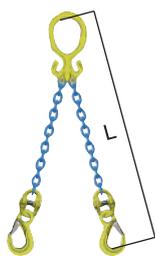


MG2-EKN

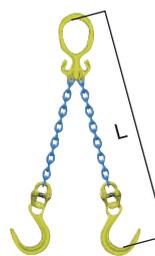


MG2-OKE

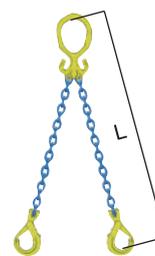

MG2-GBK

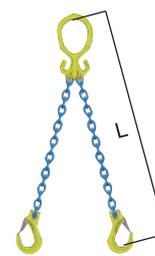

MG2-EGKNA

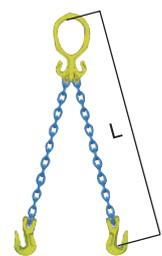

MG2-GGA
(for choke lifts)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | | Master Link MGD |
|---------|---------------------|---------------------------|---------------|---------|---------|---------|---------|-----------|-----------------|
| | | | MG2-BK | MG2-BKL | MG2-EKN | MG2-OKE | MG2-GBK | MG2-EGKNA | |
| 2.5 | 2.1 | 6 | Master Link B | 60 | | | - | 60 | |
| | | | Set Weight | 3.8 | 4.2 | 3.7 | - | 3.6 | 3.6 |
| 4.2 | 3.5 | 8 | Master Link B | 75 | | | | | |
| | | | Set Weight | 6.8 | 7.3 | 6.2 | 6.6 | 6.4 | 5.8 |
| 6.9 | 5.6 | 10 | Master Link B | 90 | | | | | |
| | | | Set Weight | 11.0 | 11.7 | 10.0 | 10.8 | 10.1 | 9.8 |
| 11.6 | 9.5 | 13 | Master Link B | 105 | | | | | |
| | | | Set Weight | 19.8 | 21.2 | 18.6 | 19.4 | 18.7 | 17.9 |
| 17.1 | 14.0 | 16 | Master Link B | 120 | | | | | |
| | | | Set Weight | 31.5 | 33.8 | 28.5 | 31.3 | 28.5 | 27.3 |

* In addition to the sizes listed in the table above, we also offer chains with a diameter of up to 32 mm (WLL 40 t).

* When choke lifting with a GGA Grab Hook, the working load limits (WLL) are 80% of the values shown in above table.

* Please note that the working load limits change if the lifting angle exceeds 60°.


* When using two or more chain slings to lift unbalanced (asymmetric) load by adjusting the chain length, refer to the WLL values for 1-leg lifting.

Sets Including Couplings with Shortening Function

Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C

1-leg Sets

When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

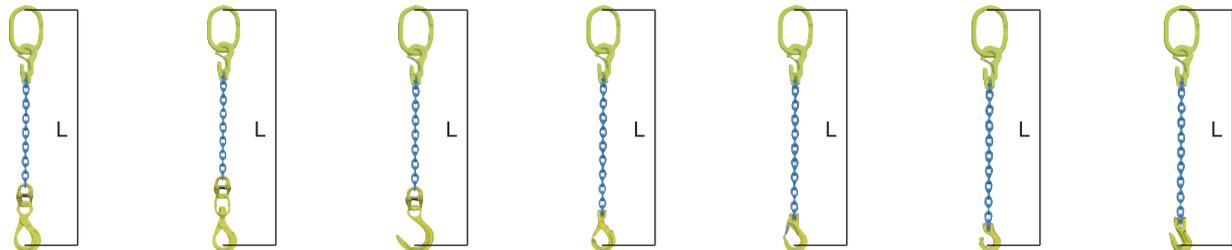


TG1-BK TG1-BKL TG1-OKE TG1-GBK TG1-EGKNA TG1-CL (for choke/basket lifts) TG1-GGA (for choke lifts)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|---------------------|---------------------------|----------|---------|---------|---------|-----------|--------|---------|---|
| | | | TG1-BK | TG1-BKL | TG1-OKE | TG1-GBK | TG1-EGKNA | TG1-CL | TG1-GGA | |
| 1.5 | 6 | Master Link B | 60 | | | 60 | | | | |
| | | Set Weight | 2.2 | 2.4 | - | 2.1 | 2.1 | 1.9 | 2.0 | |
| 2.6 | 8 | Master Link B | 60 | | | | | | 80 | 60 |
| | | Set Weight | 3.8 | 4.1 | 3.7 | 3.6 | 3.3 | 3.8 | 3.3 | |
| 4.0 | 10 | Master Link B | 80 | | | | | | 95 | 80 |
| | | Set Weight | 6.4 | 6.8 | 6.3 | 6.2 | 5.9 | 6.6 | 5.9 | |
| 6.8 | 13 | Master Link B | 95 | | | | | | 145 | 95 |
| | | Set Weight | 12.0 | 12.7 | 11.8 | 11.4 | 10.7 | 13.0 | 10.7 | |
| 10.0 | 16 | Master Link B | 145 | | | | | | | |
| | | Set Weight | 21.0 | 21.8 | 20.4 | 19.3 | 18.7 | 20.4 | 18.5 | |

2-leg Sets

When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

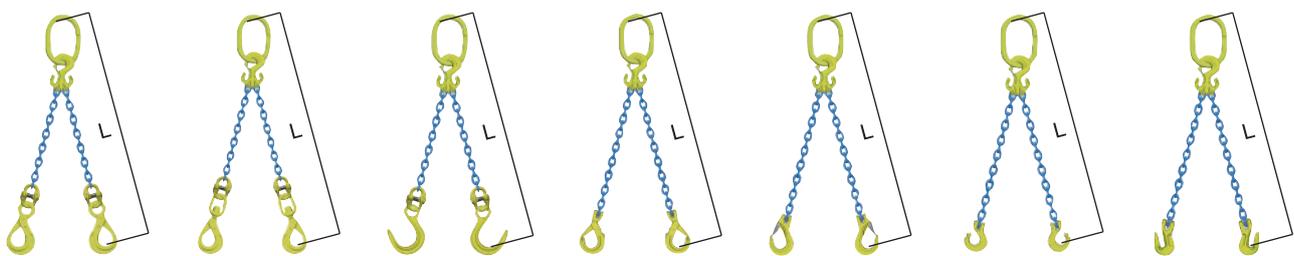

TG2-BK TG2-BKL TG2-OKE TG2-GBK TG2-EGKNA TG2-CL (for choke/basket lifts) TG2-GGA (for choke lifts)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). | |
|---------|---------------------|---------------------------|---------------|---------|---------|---------|-----------|--------|---------|---|-----|
| | | | TG2-BK | TG2-BKL | TG2-OKE | TG2-GBK | TG2-EGKNA | TG2-CL | TG2-GGA | | |
| 60° | 90° | 6 | Master Link B | 80 | | | 80 | | | | |
| 2.5 | | | Set Weight | 4.3 | 4.7 | - | 4.0 | 4.0 | 3.7 | 3.8 | |
| 4.2 | 3.5 | 8 | Master Link B | 95 | | | | | | | |
| | | | Set Weight | 8.0 | 8.4 | 7.8 | 7.6 | 7.1 | 7.2 | 7.0 | |
| 6.9 | 5.6 | 10 | Master Link B | 95 | | | | | | 145 | 95 |
| | | | Set Weight | 12.3 | 13.0 | 12.1 | 11.7 | 11.1 | 12.9 | 11.2 | |
| 11.6 | 9.5 | 13 | Master Link B | 145 | | | | | | | |
| | | | Set Weight | 23.0 | 24.2 | 22.6 | 21.9 | 20.5 | 22.3 | 20.5 | |
| 17.1 | 14.0 | 16 | Master Link B | 145 | | | | | | 150 | 145 |
| | | | Set Weight | 37.2 | 38.9 | 36.0 | 33.8 | 32.6 | 35.9 | 32.3 | |


* In addition to the sizes listed in the table above, we also offer chains with a diameter of up to 32 mm (WLL 40 t).
 * When choke lifting with a GGA Grab Hook or a CL Single C-Lock, the working load limits (WLL) are 80% of the values shown in above table.
 * Please note that the working load limits change if the lifting angle exceeds 60°.
 * When using two or more chain slings to lift unbalanced (asymmetric) load by adjusting the chain length, refer to the WLL values for 1-leg lifting.

Sets Including Couplings with Shortening Function


Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C

3-leg Sets

When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

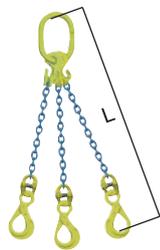


TG3-BK

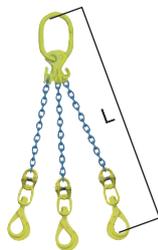


TG3-BKL




TG3-OKE

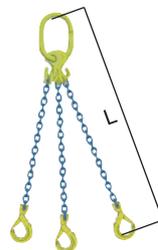

TG3-GBK

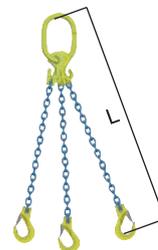

TG3-EGKNA

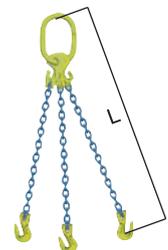


TG3-GGA
(for choke lifts)

| WLL (t) | | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|------|---------------------|---------------------------|----------|---------|---------|---------|-----------|---------|---|
| 60° | 90° | | | TG3-BK | TG3-BKL | TG3-OKE | TG3-GBK | TG3-EGKNA | TG3-GGA | |
| 3.8 | 3.1 | 6 | Master Link B | 80 | | - | 80 | | | |
| | | | Set Weight | 6.2 | 6.7 | - | 5.7 | 5.7 | | 5.3 |
| 6.4 | 5.2 | 8 | Master Link B | 95 | | | | | | |
| | | | Set Weight | 11.3 | 12.0 | 11.0 | 10.7 | 10.0 | 9.9 | |
| 10.3 | 8.4 | 10 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 19.4 | 20.4 | 19.5 | 18.5 | 18.0 | 17.7 | |
| 17.4 | 14.2 | 13 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 34.2 | 35.9 | 33.6 | 32.6 | 30.5 | 30.5 | |
| 25.7 | 21.0 | 16 | Master Link B | 150 | | | | | | |
| | | | Set Weight | 56.6 | 60.1 | 54.8 | 51.3 | 50.3 | 49.8 | |

4-leg Sets


When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

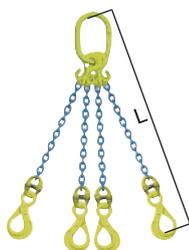

TG4-BK



TG4-BKL

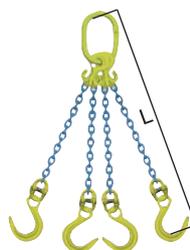

TG4-OKE



TG4-GBK



TG4-EGKNA



TG4-GGA
(for choke lifts)


| WLL (t) | | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|------|---------------------|---------------------------|----------|---------|---------|---------|-----------|---------|---|
| 60° | 90° | | | TG4-BK | TG4-BKL | TG4-OKE | TG4-GBK | TG4-EGKNA | TG4-GGA | |
| 3.8 | 3.1 | 6 | Master Link B | 80 | | - | 80 | | | |
| | | | Set Weight | 7.9 | 8.6 | - | 7.3 | 7.3 | | 6.7 |
| 6.4 | 5.2 | 8 | Master Link B | 95 | | | | | | |
| | | | Set Weight | 14.4 | 15.3 | 14.0 | 13.6 | 12.7 | 12.6 | |
| 10.3 | 8.4 | 10 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 24.2 | 25.6 | 24.3 | 23.0 | 22.3 | 21.9 | |
| 17.4 | 14.2 | 13 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 43.3 | 45.6 | 42.5 | 41.1 | 38.3 | 38.3 | |
| 25.7 | 21.0 | 16 | Master Link B | 150 | | | | | | |
| | | | Set Weight | 71.7 | 76.4 | 69.3 | 64.7 | 63.3 | 62.7 | |

- * In addition to the sizes listed in the table above, we also offer chains with a diameter of up to 32 mm (WLL 40 t).
- * When choke lifting with a GGA Grab Hook, the working load limits (WLL) are 80% of the values shown in above table.
- * Please note that the working load limits change if the lifting angle exceeds 60°.
- * When using two or more chain slings to lift unbalanced (asymmetric) load by adjusting the chain length, refer to the WLL values for 1-leg lifting.

Sets without Shortening Function

Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C

1-leg Sets

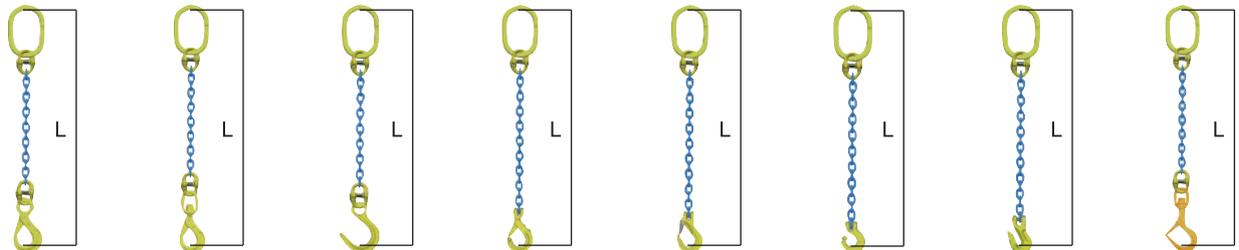


TA1-BK TA1-BKL TA1-OKE TA1-GBK TA1-EGKNA TA1-CL (for choke/basket lifts) TA1-GGA (for choke lifts) TA1-BMS (for steel plates)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|---------------------|---------------------------|----------|---------|---------|---------|-----------|--------|---------|---------|---|
| | | | TA1-BK | TA1-BKL | TA1-OKE | TA1-GBK | TA1-EGKNA | TA1-CL | TA1-GGA | TA1-BMS | |
| 1.5 | 6 | Master Link B | 60 | | - | 60 | | | - | | |
| | | Set Weight | 2.1 | 2.2 | - | 1.9 | 1.9 | 1.8 | 1.8 | - | |
| 2.6 | 8 | Master Link B | 60 | | | | | 80 | 60 | - | |
| | | Set Weight | 3.3 | 3.5 | 3.2 | 3.1 | 2.8 | 3.3 | 2.8 | - | |
| 4.0 | 10 | Master Link B | 80 | | | | | 95 | 80 | 80 | |
| | | Set Weight | 5.4 | 5.7 | 5.3 | 5.1 | 4.9 | 5.5 | 4.8 | 7.6 | |
| 6.8 | 13 | Master Link B | 95 | | | | | 145 | 95 | - | |
| | | Set Weight | 9.8 | 10.5 | 9.6 | 9.2 | 8.5 | 10.6 | 8.5 | - | |
| 10.0 | 16 | Master Link B | 145 | | | | | - | - | - | |
| | | Set Weight | 16.5 | 17.7 | 16.5 | 14.8 | 14.7 | 15.9 | 14.0 | - | |

* TA1-BMS = 3.0t

2-leg Sets

When choke lifting, working load limits (WLL) are 80% of the values shown in below table.

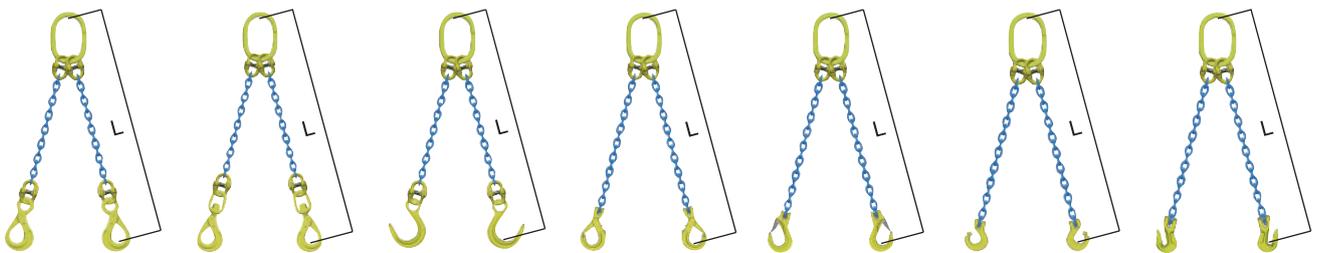

TA2-BK TA2-BKL TA2-OKE TA2-GBK TA2-EGKNA TA2-CL (for choke/basket lifts) TA2-GGA (for choke lifts)

| WLL (t) | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). | |
|---------|---------------------|---------------------------|---------------|---------|---------|---------|-----------|--------|---|---------|
| | | | TA2-BK | TA2-BKL | TA2-OKE | TA2-GBK | TA2-EGKNA | TA2-CL | | TA2-GGA |
| 2.5 | 2.1 | 6 | Master Link B | 60 | | - | 60 | | | |
| | | | Set Weight | 3.7 | 4.0 | - | 3.4 | 3.4 | 3.1 | 3.1 |
| 4.5 | 3.6 | 8 | Master Link B | 80 | | | | | | |
| | | | Set Weight | 6.6 | 7.1 | 6.4 | 6.2 | 5.6 | 5.8 | 5.6 |
| 6.9 | 5.6 | 10 | Master Link B | 95 | | | | | | |
| | | | Set Weight | 10.7 | 11.4 | 10.5 | 10.1 | 9.5 | 9.6 | 9.6 |
| 11.7 | 9.6 | 13 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 19.5 | 20.7 | 19.1 | 18.4 | 17.0 | 17.6 | 17.0 |
| 17.3 | 14.1 | 16 | Master Link B | 145 | | | | | | |
| | | | Set Weight | 30.8 | 32.7 | 29.6 | 27.5 | 26.3 | 27.3 | 25.9 |

* In addition to the sizes listed in the table above, we also offer chains with a diameter of up to 32 mm (WLL 40 t).

* When choke lifting with a GGA Grab Hook or a CL Single C-Lock, the working load limits (WLL) are 80% of the values shown in above table.


* Please note that the working load limits change if the lifting angle exceeds 60°.

Sets without Shortening Function


Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C

3-leg Sets


When choke lifting, working load limits (WLL) are 80% of the values shown in below table.




TL3-BK




TL3-BKL




TL3-OKE




TL3-GBK



TL3-EGKNA




TL3-GGA
(for choke lifts)


| WLL (t) | | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|------|---------------------|---------------------------|----------|---------|---------|---------|-----------|---------|---|
| 60° | 90° | | | TL3-BK | TL3-BKL | TL3-OKE | TL3-GBK | TL3-EGKNA | TL3-GGA | |
| 3.8 | 3.1 | 6 | Master Link B | 80 | | | | | | 80 |
| | | | Set Weight | 6.0 | 6.5 | - | 5.5 | 5.5 | 5.0 | |
| 6.4 | 5.2 | 8 | Master Link B | 95 | | | | | | 95 |
| | | | Set Weight | 10.5 | 11.4 | 10.4 | 10.1 | 9.4 | 9.3 | |
| 10.3 | 8.4 | 10 | Master Link B | 145 | | | | | | 145 |
| | | | Set Weight | 18.2 | 19.3 | 18.3 | 17.3 | 16.8 | 16.5 | |
| 17.4 | 14.2 | 13 | Master Link B | 145 | | | | | | 145 |
| | | | Set Weight | 31.6 | 33.3 | 31.0 | 30.0 | 27.9 | 27.9 | |
| 25.7 | 21.0 | 16 | Master Link B | 150 | | | | | | 150 |
| | | | Set Weight | 51.2 | 54.7 | 49.4 | 46.7 | 44.9 | 44.4 | |

4-leg Sets


When choke lifting, working load limits (WLL) are 80% of the values shown in below table.



TL4-BK



TL4-BKL




TL4-OKE



TL4-GBK



TL4-EGKNA



TL4-GGA
(for choke lifts)

| WLL (t) | | Chain Diameter (mm) | Width (mm) Weight (kg) | Set Code | | | | | |  Master Link MFA/MF * For large crane hooks, use master link MFX (B dimension = 180 mm). |
|---------|------|---------------------|---------------------------|----------|---------|---------|---------|-----------|---------|---|
| 60° | 90° | | | TL4-BK | TL4-BKL | TL4-OKE | TL4-GBK | TL4-EGKNA | TL4-GGA | |
| 3.8 | 3.1 | 6 | Master Link B | 80 | | | | | | 80 |
| | | | Set Weight | 7.6 | 8.3 | - | 7.0 | 7.0 | 6.4 | |
| 6.4 | 5.2 | 8 | Master Link B | 95 | | | | | | 95 |
| | | | Set Weight | 13.4 | 14.6 | 13.3 | 12.9 | 12.0 | 11.8 | |
| 10.3 | 8.4 | 10 | Master Link B | 145 | | | | | | 145 |
| | | | Set Weight | 22.7 | 24.2 | 22.9 | 21.5 | 20.9 | 20.5 | |
| 17.4 | 14.2 | 13 | Master Link B | 145 | | | | | | 145 |
| | | | Set Weight | 39.9 | 42.2 | 39.1 | 37.7 | 34.9 | 34.9 | |
| 25.7 | 21.0 | 16 | Master Link B | 150 | | | | | | 150 |
| | | | Set Weight | 64.5 | 69.1 | 62.1 | 58.5 | 56.1 | 55.4 | |

* In addition to the sizes listed in the table above, we also offer chains with a diameter of up to 32 mm (WLL 40 t).


* When choke lifting with a GGA Grab Hook, the working load limits (WLL) are 80% of the values shown in above table.

* Please note that the working load limits change if the lifting angle exceeds 60°.

"Sling Master" and "Sling Expert"

Chain sling sets designed for easy rearrangement of the number of sling legs.
 Standard chain length 2 m / Safety factor 4:1 / Use temperature -40°C to 200°C


38% less cost compared to conventional equipment

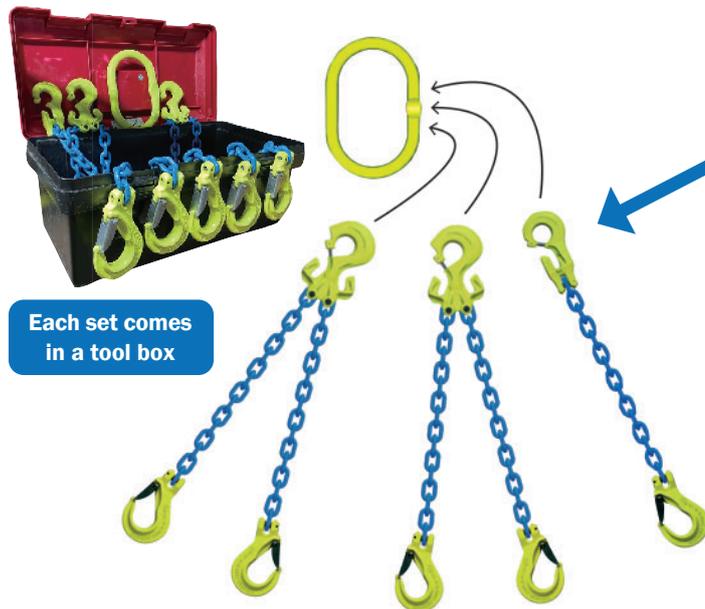

Each set comes in a tool box



When using conventional slings, 10 chains are necessary → cost intensive!

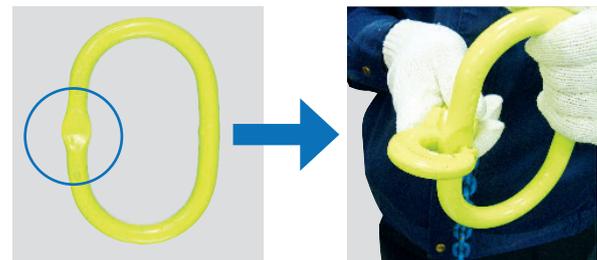

Couplings only fit at the flattened section of the master link, guaranteeing safe attachment. No tools necessary.

Set Advantages

- Easy assembly of a 1-leg, 2-leg, 3-leg or 4-leg sling ("Sling Expert" 2-leg and 4-leg sling)
- The number of chains needed is half that of conventional products, resulting in better cost efficiency.
- Thanks to its chain shortening function suitable for various loads.
- Two hook types available: GBK Griplatch Hook / EGKNA Sling Hook




| Set Name | Set Code | | Chain Diameter (mm) | WLL (t) max lifting angle 90° | | | | Master Link B Dimension (mm) |
|--------------|-----------|------------|---------------------|-------------------------------|--------|--------|--------|------------------------------|
| | Hook GBK | Hook EGKNA | | 1 leg | 2 legs | 3 legs | 4 legs | |
| Sling Master | TT-SB2 V2 | TT-SE2 V2 | 6 | 1.5 | 2.1 | 3.1 | 3.1 | 80 |
| Sling Master | TT-MB2 V2 | TT-ME2 V2 | 8 | 2.6 | 3.5 | 5.2 | 5.2 | 95 |
| Sling Expert | TM-SB2 V2 | TM-SE2 V2 | 6 | - | 2.1 | - | 3.1 | 80 |
| Sling Expert | TM-MB2 V2 | TM-ME2 V2 | 8 | - | 3.5 | - | 5.2 | 95 |

- Other chain sling combinations than the standard sets shown in this catalogue are available.
 - If a standard master link does not fit onto the crane hook, we can provide alternative products.
 - We also offer inspections for our lifting equipment.
- Please contact us for further details.*

For videos about high-end lifting products, please check out our YouTube channel.
www.youtube.com/@MartecLiftingEquipment

Chain

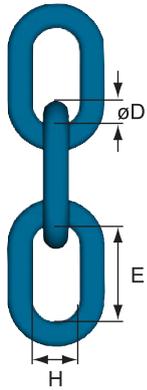


KLA Chain

Safety factor 4:1

We cut the chain length according to your request.

| Product Code | WLL (t) | Dimensions (mm) | | | Weight (kg/m) |
|--------------|---------|-----------------|----|-----|---------------|
| | | ØD | E | H | |
| KLA-6-10 | 1.5 | 6 | 18 | 8.5 | 0.8 |
| KLA-8-10 | 2.6 | 8 | 24 | 11 | 1.4 |
| KLA-10-10 | 4.0 | 10 | 30 | 14 | 2.3 |
| KLA-13-10 | 6.8 | 13 | 39 | 18 | 3.8 |
| KLA-16-10 | 10.0 | 16 | 48 | 22 | 5.6 |
| KLA-20-10 | 16.0 | 20 | 60 | 27 | 9.4 |
| KLA-22-10 | 20.0 | 22 | 66 | 29 | 11.9 |
| KLA-26-10 | 27.0 | 26 | 78 | 35 | 16.4 |
| KLA-32-10 | 40.0 | 32 | 96 | 42 | 25.8 |

Master Links

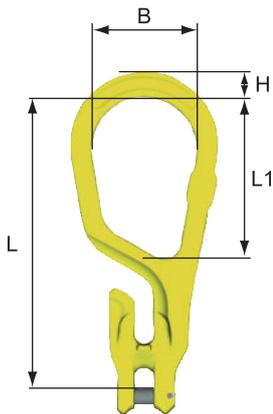


MG Single Master Link (with shortening)


Safety factor 4:1

Master link with an inbuilt shortening function for single-leg lifting. With just this one master link the chain length can be adjusted to the optimum lifting height.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|-----|-----|----|-------------|
| | | | L | L1 | B | H | |
| MG-6-10 | 1.5 | 6 | 145 | 88 | 60 | 15 | 0.5 |
| MG-8-10 | 2.6 | 8 | 171 | 92 | 60 | 18 | 0.9 |
| MG-10-10 | 4.0 | 10 | 211 | 113 | 75 | 22 | 1.8 |
| MG-13-10 | 6.8 | 13 | 261 | 136 | 90 | 26 | 3.6 |
| MG-16-10 | 10.3 | 16 | 311 | 157 | 105 | 31 | 6.1 |

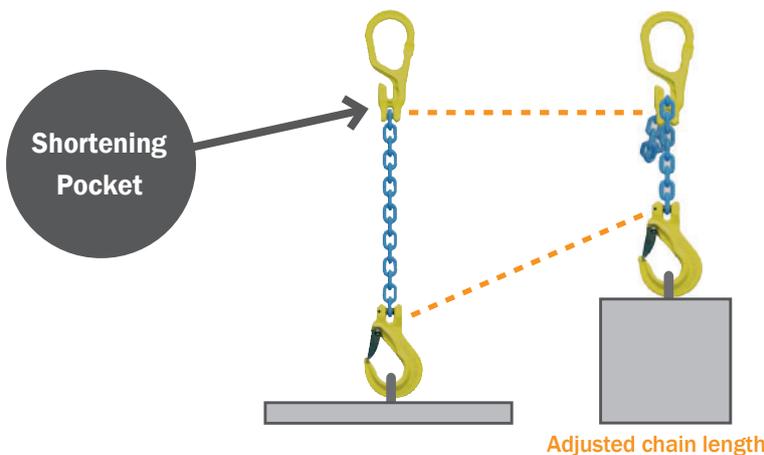


* Image for illustrative purposes only

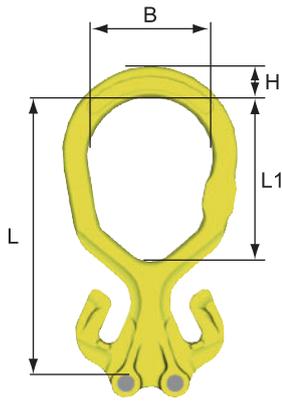


MGD Single Master Link (with shortening) Safety factor 4:1

Master link with shortening function for double-leg lifting. With this one master link, the length of each chain can be adjusted to the optimum lifting height. (maximum lifting angle 90 degrees)

| Product Code | WLL (t) | | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|------|---------------------|-----------------|-----|-----|----|-------------|
| | 60° | 90° | | L | L1 | B | H | |
| MGD-6-10 | 2.5 | 2.1 | 6 | 144 | 90 | 60 | 17 | 0.7 |
| MGD-8-10 | 4.2 | 3.5 | 8 | 171 | 100 | 75 | 21 | 1.3 |
| MGD-10-10 | 6.9 | 5.6 | 10 | 211 | 124 | 90 | 24 | 2.3 |
| MGD-13-10 | 11.6 | 9.5 | 13 | 262 | 149 | 105 | 31 | 4.8 |
| MGD-16-10 | 17.1 | 14.0 | 16 | 309 | 175 | 120 | 35 | 8.2 |

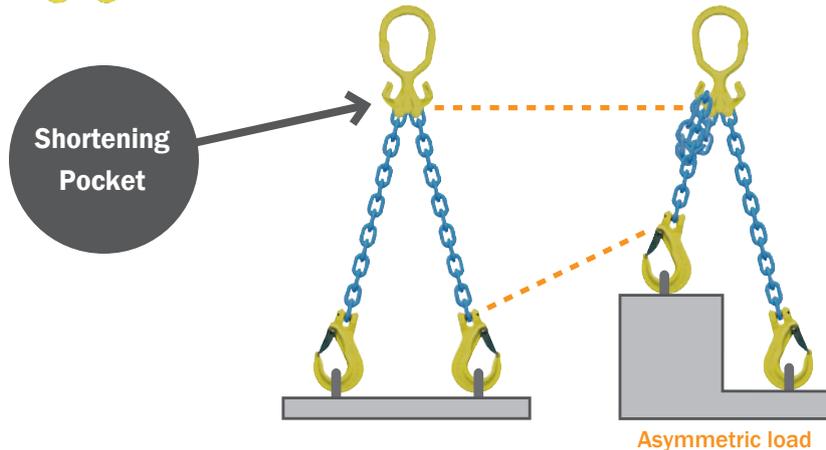

* Image for illustrative purposes only

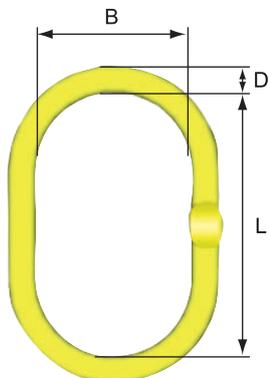


MFA/MF Master Link

Safety factor 5:1

Master link for one-leg to four-leg lifting. Use it together with CL Single C-Lock, CLD Double C-Lock, CG Single Grab or CGD Double Grab.

| Product Code | WLL (t) | Dimensions (mm) | | | Weight (kg) |
|---------------|---------|-----------------|-----|----|-------------|
| | | L | B | D | |
| MF-6-10 V2 | 2.0 | 100 | 60 | 11 | 0.2 |
| MF-86-10 V2 | 3.2 | 120 | 60 | 13 | 0.4 |
| MF-108-10 V2 | 5.4 | 140 | 80 | 17 | 0.8 |
| MF-1310-10 V2 | 8.2 | 160 | 95 | 22 | 1.5 |
| MF-1613-10 V2 | 13.6 | 275 | 145 | 28 | 3.9 |
| MF-2016-10 V2 | 20.6 | 275 | 145 | 32 | 5.1 |
| MFA-2220-10 | 30.9 | 250 | 150 | 40 | 7.8 |

*No "V2" mark on actual product.

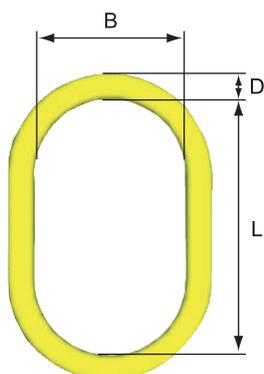


M Master Link

Safety factor 5:1

Master link to lift heavy objects. Connect it to chain with GA Coupling Link or use it for wire slings.

| Product Code | WLL (t) | Dimensions (mm) | | | Weight (kg) |
|--------------|---------|-----------------|-----|----|-------------|
| | | L | B | D | |
| M-2622-10 V2 | 41.0 | 340 | 180 | 45 | 12.9 |
| M-3226-10 V2 | 57.0 | 350 | 200 | 55 | 20.7 |
| M-3632-10 V2 | 72.0 | 375 | 210 | 60 | 26.0 |
| M-100T-10 V2 | 100.0 | 450 | 250 | 70 | 42.7 |
| M-125T-10 V2 | 125.0 | 450 | 260 | 80 | 57.0 |

*No "V2" mark on actual product.

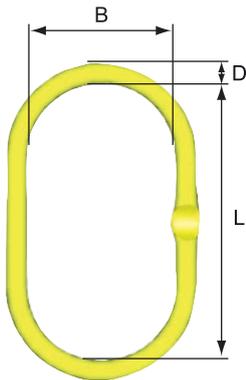

MFX Master Link (for large crane hooks)


Safety factor 5:1

B dimension 180 mm

Master link with a larger opening suitable for large cranes for single-leg or double-leg lifting. Use it together with Single C-Lock CL, Double C-Lock CLD, Single Grab CG and Double Grab CGD.

| Product Code | WLL (t) | Dimensions (mm) | | | Weight (kg) |
|----------------|---------|-----------------|-----|----|-------------|
| | | L | B | D | |
| MFX-108-10 V2 | 5.4 | 340 | 180 | 22 | 2.8 |
| MFX-1310-10 V2 | 8.2 | 340 | 180 | 28 | 4.7 |
| MFX-1613-10 | 13.6 | 340 | 180 | 34 | 7.1 |
| MFX-2016-10 V2 | 20.6 | 340 | 180 | 40 | 9.7 |

*No "V2" mark on actual product.

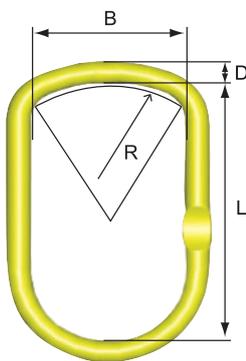


MFH Master Link (for large crane hooks)

Safety factor 5:1

Master link with a larger opening for one-leg to four-leg lifting. The lower part of this "hybrid" is shaped like a regular master link, the upper part is shaped to fit perfectly on a crane hook.

| Product Code | WLL (t) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|-----------------|-----|----|-----|-------------|
| | | L | B | D | R | |
| MFH-1310-10 | 8.0 | 230 | 125 | 22 | 118 | 2.0 |
| MFH-1613-10 | 13.6 | 250 | 135 | 28 | 132 | 3.6 |
| MFH-2016-10 | 20.6 | 280 | 135 | 32 | 100 | 5.2 |
| MFH-2220-10 | 30.9 | 320 | 175 | 40 | 120 | 9.6 |
| MFHW-2220-10 | 28.0 | 355 | 225 | 40 | 160 | 10.9 |

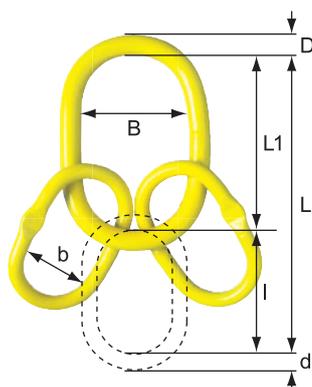

MT Master Link (with sub links)


Safety factor 5:1

Master link with two sub-links for three-leg or four-leg lifting. Connect it to chain with GA Coupling Link or use it for wire slings.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|-----------------|-----|----|-----|-----|----|-----|-------------|
| | | L | B | ØD | l | b | Ød | L1 | |
| MT-6-10 | 5.0 | 280 | 90 | 19 | 120 | 60 | 13 | 160 | 1.8 |
| MT-8-10 V2 | 7.8 | 300 | 95 | 22 | 140 | 80 | 17 | 160 | 3.0 |
| MT-10-10 V2 | 12.0 | 435 | 145 | 28 | 160 | 95 | 22 | 275 | 6.8 |
| MT-13-10 V2 | 21.0 | 465 | 145 | 32 | 190 | 110 | 28 | 275 | 10.9 |
| MT-16-10 V2 | 31.0 | 545 | 140 | 40 | 275 | 145 | 32 | 270 | 18.4 |
| MT-20-10 V2 | 48.0 | 610 | 180 | 45 | 270 | 140 | 40 | 340 | 29.1 |
| MT-22-10 | 75.0 | 610 | 200 | 60 | 260 | 140 | 45 | 350 | 45.6 |
| MT-26-10 V2 | 85.0 | 725 | 210 | 60 | 350 | 200 | 55 | 375 | 67.6 |
| MT-32-10 | 125.0 | 730 | 260 | 80 | 280 | 160 | 55 | 450 | 91.9 |

*No "V2" mark on actual product.

Couplings

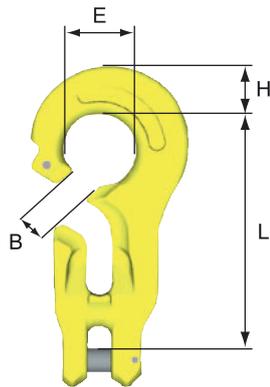


CG Single Grab (with shortening)

Safety factor 4:1

Coupling with integrated shortening for 1-leg chain slings, which can be used as master link connection or for basket lifting. For 2-leg slings please use double grab coupling CGD.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|-------------|
| | | | L | B | E | H | |
| CG-6-10 | 1.5 | 6 | 80 | 11 | 24 | 19 | 0.3 |
| CG-8-10 | 2.6 | 8 | 107 | 12 | 32 | 24 | 0.8 |
| CG-10-10 | 4.0 | 10 | 134 | 15 | 40 | 29 | 1.5 |
| CG-13-10 | 6.8 | 13 | 172 | 18 | 52 | 38 | 3.2 |
| CG-16-10 | 10.3 | 16 | 215 | 22 | 64 | 47 | 6.1 |

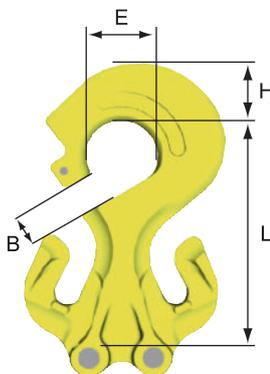


CGD Double Grab (with shortening)


Safety factor 4:1

Coupling with integrated shortening for 2-leg chain slings, which can be used as master link connection or for basket lifting. (maximum lifting angle 90 degrees)

| Product Code | WLL (t) | | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|------|---------------------|-----------------|----|----|----|-------------|
| | 60° | 90° | | L | B | E | H | |
| CGD-6-10 | 2.5 | 2.1 | 6 | 79 | 11 | 24 | 21 | 0.5 |
| CGD-8-10 | 4.2 | 3.5 | 8 | 107 | 12 | 32 | 28 | 1.3 |
| CGD-10-10 | 6.9 | 5.6 | 10 | 134 | 15 | 40 | 37 | 2.5 |
| CGD-13-10 | 11.6 | 9.5 | 13 | 173 | 18 | 52 | 46 | 5.5 |
| CGD-16-10 | 17.1 | 14.0 | 16 | 215 | 22 | 64 | 57 | 10.2 |

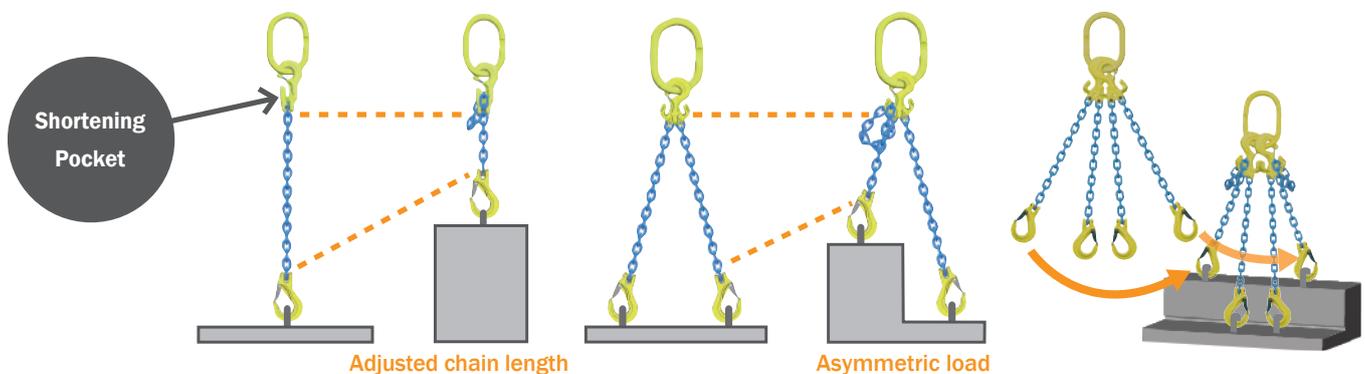

* Images for illustrative purposes only

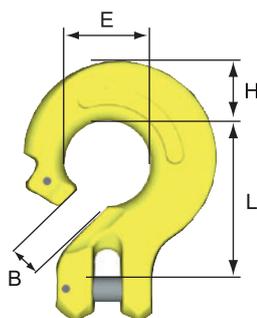


CL Single C-Lock

Safety factor 4:1

It can be used as a choke hook, for basket lifting, and as a coupling to connect chain to a master link. Please use CLD to attach two chains. When choke lifting, the working load limits (WLL) are 80% of the values shown in below table.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|-------------|
| | | | L | B | E | H | |
| CL-6-10 | 1.5 | 6 | 43 | 11 | 24 | 18 | 0.2 |
| CL-8-10 | 2.6 | 8 | 59 | 12 | 32 | 23 | 0.5 |
| CL-10-10 | 4.0 | 10 | 73 | 15 | 40 | 29 | 0.9 |
| CL-13-10 | 6.8 | 13 | 95 | 18 | 52 | 37 | 2.0 |
| CL-16-10 | 10.3 | 16 | 118 | 22 | 64 | 47 | 3.8 |

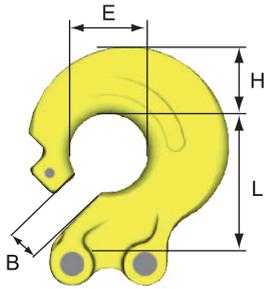

CLD Double C-Lock

Safety factor 4:1

C-lock for two chains. It can be used as a coupling to connect chains to a master link, or for basket lifting. (maximum lifting angle 90 degrees)

| Product Code | WLL (t) | | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|------|---------------------|-----------------|----|----|----|-------------|
| | 60° | 90° | | L | B | E | H | |
| CLD-6-10 | 2.5 | 2.1 | 6 | 43 | 11 | 24 | 21 | 0.3 |
| CLD-8-10 | 4.2 | 3.5 | 8 | 57 | 12 | 32 | 28 | 0.8 |
| CLD-10-10 | 6.9 | 5.6 | 10 | 71 | 15 | 40 | 36 | 1.5 |
| CLD-13-10 | 11.6 | 9.5 | 13 | 94 | 18 | 52 | 46 | 3.2 |
| CLD-16-10 | 17.1 | 14.0 | 16 | 115 | 25 | 64 | 56 | 5.5 |



CL



CLD





CLD (2 pieces)

QP Quick Pin

Locking pin for CG, CGD, CL, CLD. The lock can be opened and closed with a single touch. It can prevent chain from falling off during choke lifting.



| Product Code |
|--------------|
| QP-6 |
| QP-8 |
| QP-10 |
| QP-13 |
| QP-16 |

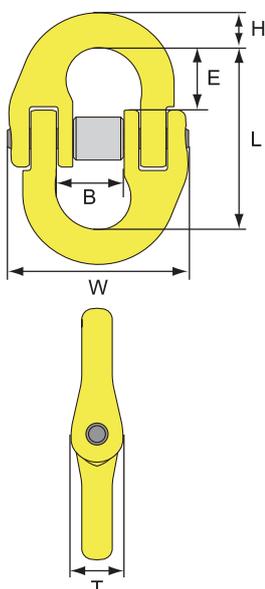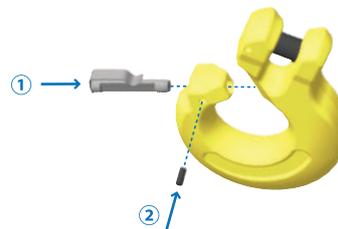

GA Coupling Link

Safety factor 4:1

Coupling to connect chain to hooks or master links. Pin collar with helical spring, allowing to be attached with just a hammer. The pin stays securely locked even after repeated use.


| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|------|----|----|-----|-------------|
| | | | L | B | H | E | T | W | |
| GA-6-10 | 1.5 | 6 | 45 | 15 | 8 | 16 | 13 | 44 | 0.1 |
| GA-8-10 | 2.6 | 8 | 56 | 18 | 11 | 20 | 16 | 50 | 0.2 |
| GA-10-10 | 4.0 | 10 | 68 | 25 | 13 | 23 | 19 | 67 | 0.3 |
| GA-13-10 | 6.8 | 13 | 89 | 30 | 17 | 31 | 25 | 82 | 0.7 |
| GA-16-10 | 10.3 | 16 | 106 | 36 | 20 | 38 | 30 | 103 | 1.4 |
| GA-20-10 | 16.0 | 20 | 125 | 43 | 26 | 44 | 39 | 123 | 2.7 |
| GA-22-10 | 20.0 | 22 | 152 | 50 | 28 | 55 | 45 | 142 | 3.6 |
| GA-26-10 | 27.3 | 26 | 161 | 58 | 33.5 | 56 | 51 | 166 | 5.7 |
| GA-32-10 | 40.0 | 32 | 200 | 70 | 40 | 72 | 56 | 206 | 9.5 |

Table of Connectable Master Links and Couplings

| | |  MFA/MF | | | | | |  MFX | | | |  MFH/MFHW | | | |
|-----|---|---|-----|------|------|------|------|---|------|------|------|---|------|------|------|
| | | 86 | 108 | 1310 | 1613 | 2016 | 2220 | 108 | 1310 | 1613 | 2016 | 1310 | 1613 | 2016 | 2220 |
| | | CG | 6 | ● | ● | | | | | | | | | | |
| 8 | ● | ● | ● | | | | ● | | | | | ● | | | |
| 10 | ● | ● | ● | ● | | | ● | ● | | | | ● | ● | | |
| 13 | ● | ● | ● | ● | ● | | ● | ● | ● | | | ● | ● | ● | |
| 16 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| CGD | 6 | ● | ● | | | | | | | | | | | | |
| 8 | ● | ● | ● | | | | ● | | | | | ● | | | |
| 10 | ● | ● | ● | ● | | | ● | ● | | | | ● | ● | | |
| 13 | ● | ● | ● | ● | ● | | ● | ● | ● | | | ● | ● | | |
| 16 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| CL | 6 | ● | ● | | | | | | | | | | | | |
| 8 | ● | ● | ● | | | | ● | | | | | ● | | | |
| 10 | ● | ● | ● | ● | | | ● | ● | | | | ● | ● | | |
| 13 | ● | ● | ● | ● | ● | | ● | ● | ● | | | ● | ● | ● | |
| 16 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| CLD | 6 | ● | ● | | | | | | | | | | | | |
| 8 | ● | ● | ● | | | | ● | | | | | ● | | | |
| 10 | ● | ● | ● | ● | | | ● | ● | | | | ● | ● | | |
| 13 | ● | ● | ● | ● | ● | | ● | ● | ● | | | ● | ● | | |
| 16 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| GA | 6 | ● | | | | | | | | | | | | | |
| 8 | ● | ● | | | | | | | | | | | | | |
| 10 | ● | ● | ● | | | | | | | | | ● | | | |
| 13 | ● | ● | ● | ● | | | | | | | | ● | ● | | |
| 16 | ● | ● | ● | ● | ● | | | | | | | ● | ● | ● | |
| 20 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |

* ● = connectable

Hooks

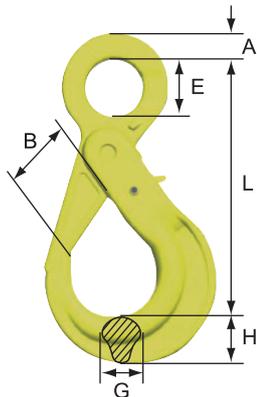

BK Safety Hook

Safety factor 4:1

Safety hook with self locking function. Hook does not open, when under load. The latch opens outward, so large wires and belt slings can be attached easily.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|-----|----|------|----|----|-------------|
| | | | L | B | E | A | G | H | |
| BK-6-10 | 1.5 | 6 | 109 | 29 | 22 | 11.5 | 15 | 21 | 0.5 |
| BK-7/8-10 | 2.6 | 8 | 137 | 37 | 28 | 14 | 17 | 25 | 0.9 |
| BK-10-10 | 4.0 | 10 | 168 | 45 | 34 | 16 | 21 | 30 | 1.5 |
| BK-13-10 | 6.8 | 13 | 207 | 55 | 44 | 20 | 30 | 39 | 3.0 |
| BK-16-10 | 10.3 | 16 | 254 | 62 | 56 | 26 | 37 | 48 | 5.5 |
| BK-18/20-10 | 16.0 | 20 | 289 | 68 | 60 | 30 | 46 | 63 | 9.0 |
| BK-22-10 | 20.0 | 22 | 320 | 80 | 70 | 32 | 50 | 62 | 11.3 |
| BK-26-10 | 27.3 | 26 | 342 | 100 | 80 | 35 | 54 | 68 | 16.4 |
| BK-32-8 | 32.8 | 32 | 400 | 120 | 90 | 40 | 62 | 86 | 23.3 |

How load is attached




1) Push down the trigger.




2) Open the latch.



3) Attach the load.

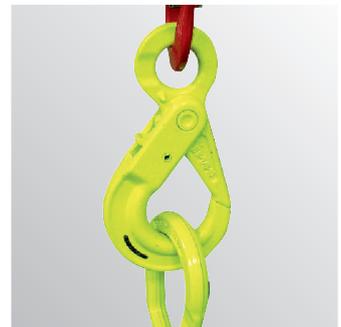

4) Latch closes securely.

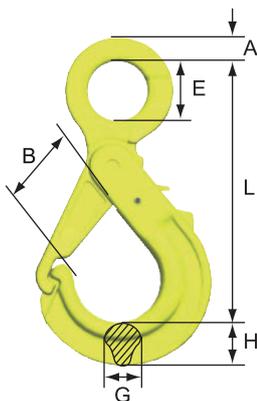

OBK Griplatch Hook

Safety factor 4:1


Safety hook with griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|------|----|----|-------------|
| | | | L | B | E | A | G | H | |
| OBK-6-10 | 1.5 | 6 | 103 | 26 | 22 | 11.5 | 15 | 17 | 0.4 |
| OBK-7/8-10 | 2.6 | 8 | 139 | 37 | 28 | 13.5 | 20 | 22 | 0.8 |
| OBK-10-10 | 4.0 | 10 | 170 | 47 | 34 | 15.5 | 22 | 29 | 1.3 |
| OBK-13-10 | 6.8 | 13 | 206 | 53 | 44 | 20.5 | 29 | 38 | 2.6 |
| OBK-16-10 | 10.3 | 16 | 251 | 68 | 56 | 25.5 | 29 | 45 | 4.4 |
| OBK-18/20-10 | 16.0 | 20 | 294 | 74 | 60 | 28 | 44 | 56 | 8.3 |
| OBK-22-8 | 15.5 | 22 | 335 | 87 | 70 | 30 | 40 | 58 | 10.2 |



The tip of the hook and the tip of the latch are interlocked and fit exactly.

In case of overloading, the hook and latch will no longer be able to interlock properly.

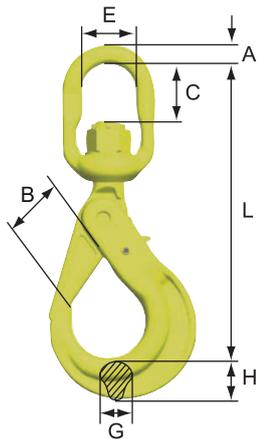


BKL Swivel Hook

Safety factor 4:1

Safety hook with swivel. The thrust washer ensures smooth rotation and removes twists in chain slings and belt slings before the load is applied, preventing damage to the sling. When using with a wire sling that generates a rotational force due to rewinding when load is applied, please use our swivel hook with bearing (BKLK) that ensures smooth rotation even when under load.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|------|----|----|----|----|-------------|
| | | | L | B | C | E | A | G | H | |
| BKL-6-10 | 1.5 | 6 | 149 | 29 | 22.5 | 33 | 11 | 15 | 21 | 0.7 |
| BKL-7/8-10 | 2.6 | 8 | 183 | 37 | 27 | 38 | 12 | 17 | 25 | 1.2 |
| BKL-10-10 | 4.0 | 10 | 218 | 45 | 37 | 44 | 15 | 21 | 30 | 2.0 |
| BKL-13-10 | 6.8 | 13 | 281 | 55 | 47 | 47 | 19 | 30 | 39 | 4.0 |
| BKL-16-10 | 10.3 | 16 | 341 | 62 | 65 | 62 | 23 | 37 | 48 | 7.2 |
| BKL-18/20-10 | 16.0 | 20 | 368 | 68 | 69 | 72 | 31 | 46 | 63 | 11.2 |

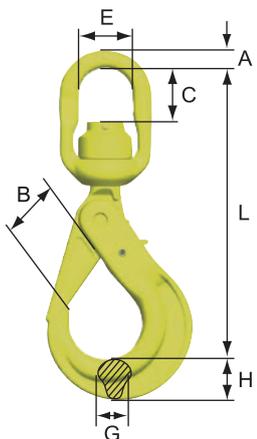


BKLK Bearing Swivel Hook

Safety factor 4:1

Safety hook with ball bearing swivel, allowing for smooth rotation even under load, expanding the range of possible applications.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | | Weight (kg) |
|---------------|---------|---------------------|-----------------|-----|-----|-----|----|----|----|-------------|
| | | | L | B | C | E | A | G | H | |
| BKLK-6-10 | 1.5 | 6 | 149 | 29 | 23 | 33 | 11 | 15 | 21 | 0.7 |
| BKLK-7/8-10 | 2.6 | 8 | 183 | 37 | 27 | 38 | 12 | 17 | 25 | 1.2 |
| BKLK-10-10 | 4.0 | 10 | 218 | 45 | 35 | 44 | 15 | 21 | 30 | 2.0 |
| BKLK-13-10 | 6.8 | 13 | 280 | 55 | 45 | 48 | 19 | 30 | 39 | 4.0 |
| BKLK-16-10 | 10.3 | 16 | 339 | 62 | 61 | 61 | 23 | 37 | 48 | 7.2 |
| BKLK-18/20-10 | 16.0 | 20 | 367 | 68 | 60 | 72 | 31 | 46 | 63 | 11.3 |
| BKLK-22-10 | 20.0 | 22 | 436 | 79 | 80 | 80 | 35 | 50 | 62 | 16.8 |
| BKLK-26-10 | 27.3 | 26 | 486 | 100 | 110 | 102 | 45 | 54 | 68 | 26.4 |

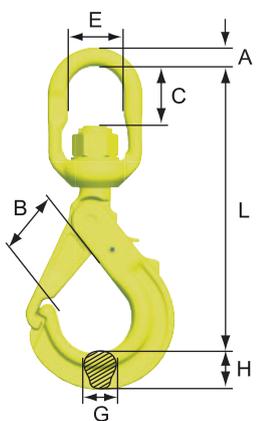


LBK Griplatch Swivel Hook

Safety factor 4:1

Safety hook with swivel and griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator. When using with a wire sling that generates a rotational force due to rewinding when load is applied, please use our griplatch swivel hook with bearing (LKBK) that ensures smooth rotation even when under load.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|----|----|----|-------------|
| | | | L | B | C | E | A | G | H | |
| LBK-7/8-10 | 2.6 | 8 | 178 | 37 | 27 | 38 | 12 | 20 | 22 | 1.1 |
| LBK-10-10 | 4.0 | 10 | 214 | 47 | 36 | 44 | 15 | 22 | 29 | 1.8 |
| LBK-13-10 | 6.8 | 13 | 265 | 54 | 47 | 48 | 19 | 29 | 35 | 3.8 |
| LBK-16-10 | 10.3 | 16 | 324 | 68 | 66 | 61 | 25 | 29 | 45 | 6.1 |

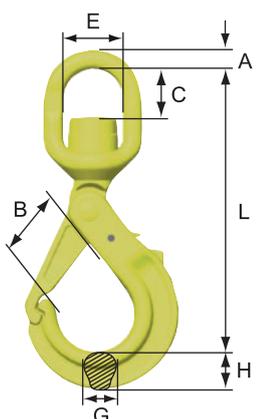


LKBK Bearing Griplatch Swivel Hook

Safety factor 4:1

Safety hook with griplatch and ball bearing swivel. In case of overloading, the misalignment of hook part and latch is a visible indicator. As it rotates smoothly even under load, it is suitable for a wide range of applications.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|----|----|----|-------------|
| | | | L | B | C | E | A | G | H | |
| LKBK-7/8-10 | 2.6 | 8 | 179 | 37 | 27 | 38 | 12 | 20 | 22 | 1.2 |
| LKBK-10-10 | 4.0 | 10 | 214 | 47 | 35 | 44 | 15 | 22 | 29 | 1.8 |
| LKBK-13-10 | 6.8 | 13 | 264 | 54 | 46 | 48 | 19 | 29 | 35 | 3.8 |
| LKBK-16-10 | 10.3 | 16 | 319 | 68 | 61 | 61 | 25 | 29 | 45 | 6.0 |

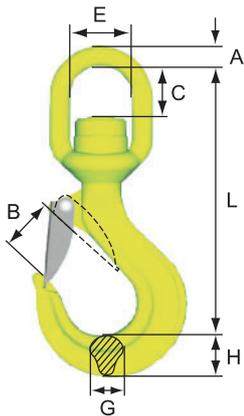


LKNK Bearing Swivel Hook

Safety factor 4:1

Hook with ball bearing swivel, allowing for smooth rotation even under load.
Suitable for a wide range of applications.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|----|----|----|-------------|
| | | | L | B | C | E | A | G | H | |
| LKNK-7/8-10 | 2.6 | 8 | 154 | 28 | 28 | 38 | 12 | 18 | 23 | 0.9 |
| LKNK-10-10 | 4.0 | 10 | 191 | 35 | 35 | 44 | 15 | 23 | 30 | 1.6 |
| LKNK-13-10 | 6.8 | 13 | 236 | 40 | 45 | 48 | 19 | 28 | 38 | 3.2 |
| LKNK-16-10 | 10.3 | 16 | 293 | 53 | 62 | 61 | 25 | 34 | 43 | 5.5 |

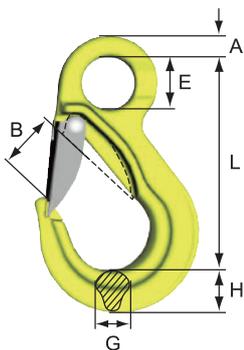


EKN Sling Hook

Safety factor 4:1

Sling hook with robust latch (thickness 3 mm to 5mm) and wide opening.
Wide range of sizes available – for working load limits from 1.2 ton to 32 ton.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|------|------|----|----|-------------|
| | | | L | B | E | A | G | H | |
| EKN-6-10 | 1.5 | 6 | 93 | 25 | 22.5 | 10.5 | 17 | 20 | 0.4 |
| EKN-7/8-10 | 2.6 | 8 | 109 | 26 | 28 | 13 | 17 | 23 | 0.6 |
| EKN-10-10 | 4.0 | 10 | 134 | 36 | 34 | 15 | 23 | 30 | 1.0 |
| EKN-13-10 | 6.8 | 13 | 166 | 42 | 44 | 19 | 28 | 38 | 2.1 |
| EKN-16-10 | 10.3 | 16 | 203 | 52 | 56 | 25.5 | 36 | 47 | 4.0 |
| EKN-18/20-10 | 16.0 | 20 | 229 | 61 | 61 | 26 | 42 | 59 | 6.4 |
| EKN-22-10 | 20.0 | 22 | 267 | 73 | 64 | 32 | 43 | 67 | 8.9 |
| EKN-26-10 | 27.3 | 26 | 301 | 82 | 66 | 32 | 51 | 75 | 13.1 |
| EKN-32-10 | 40.0 | 32 | 353 | 96 | 90 | 47 | 61 | 98 | 25.2 |

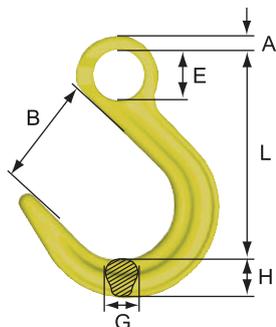


OKE Foundry Hook

Safety factor 4:1

Hook with extra wide opening. Slings with big diameter can be attached easily.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|-----|----|----|----|----|-------------|
| | | | L | B | E | A | G | H | |
| OKE-7/8-10 | 2.6 | 8 | 124 | 63 | 28 | 11 | 21 | 26 | 0.8 |
| OKE-10-10 | 4.0 | 10 | 151 | 76 | 34 | 14 | 26 | 29 | 1.4 |
| OKE-13-10 | 6.8 | 13 | 184 | 90 | 44 | 18 | 33 | 39 | 2.8 |
| OKE-16-10 | 10.3 | 16 | 218 | 102 | 56 | 22 | 40 | 46 | 4.9 |
| OKE-18/20-10 | 16.0 | 20 | 247 | 114 | 60 | 29 | 46 | 60 | 7.1 |
| OKE-22-10 | 20.0 | 22 | 275 | 120 | 64 | 32 | 60 | 70 | 11.3 |
| OKE-26-10 | 27.3 | 26 | 300 | 113 | 70 | 35 | 64 | 77 | 16.0 |
| OKE-32-8 | 32.8 | 32 | 384 | 145 | 80 | 48 | 77 | 93 | 35.0 |

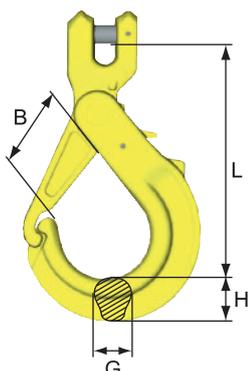


GBK Griplatch Hook

Safety factor 4:1

Clevis type safety hook with griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|-------------|
| | | | L | B | G | H | |
| GBK-6-10 | 1.5 | 6 | 87 | 26 | 15 | 17 | 0.4 |
| GBK-8-10 | 2.6 | 8 | 119 | 37 | 20 | 22 | 0.8 |
| GBK-10-10 | 4.0 | 10 | 149 | 47 | 22 | 29 | 1.3 |
| GBK-13-10 | 6.8 | 13 | 172 | 53 | 29 | 38 | 2.7 |
| GBK-16-10 | 10.3 | 16 | 208 | 68 | 30 | 45 | 4.4 |

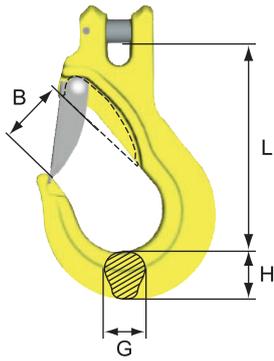


EGKNA Sling Hook

Safety factor 4:1

Clevis type sling hook with wide opening and latch. It can be connected to a KLA chain directly.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|------|----|----|-------------|
| | | | L | B | G | H | |
| EGKNA-6-10 | 1.5 | 6 | 86 | 24.5 | 17 | 20 | 0.4 |
| EGKNA-8-10 | 2.6 | 8 | 95 | 28 | 17 | 23 | 0.5 |
| EGKNA-10-10 | 4.0 | 10 | 121 | 35 | 23 | 30 | 1.0 |
| EGKNA-13-10 | 6.8 | 13 | 145 | 42 | 28 | 38 | 2.0 |
| EGKNA-16-10 | 10.3 | 16 | 170 | 52 | 36 | 46 | 3.8 |
| EGKNA-20-10 | 16.0 | 20 | 209 | 61 | 42 | 59 | 7.6 |

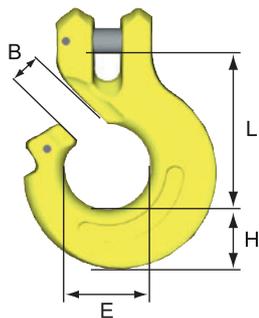


CL Single C-Lock


Safety factor 4:1

It can be used as a choke hook, for basket lifting, and as a coupling to connect chain to a master link. Please use CLD to attach two chains. When choke lifting, working load limits (WLL) are 80% of the values in below table.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|-------------|
| | | | L | B | E | H | |
| CL-6-10 | 1.5 | 6 | 43 | 11 | 24 | 18 | 0.2 |
| CL-8-10 | 2.6 | 8 | 59 | 12 | 32 | 23 | 0.5 |
| CL-10-10 | 4.0 | 10 | 73 | 15 | 40 | 29 | 0.9 |
| CL-13-10 | 6.8 | 13 | 95 | 18 | 52 | 37 | 2.0 |
| CL-16-10 | 10.3 | 16 | 118 | 22 | 64 | 47 | 3.8 |

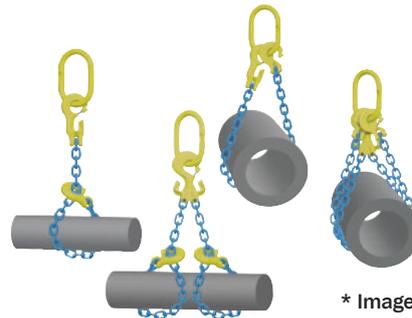

* Image for illustrative purposes only

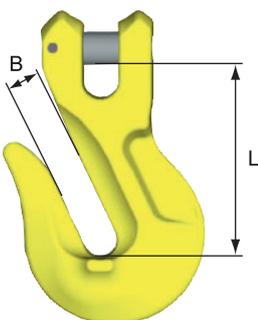


GGA Grab Hook

Safety factor 4:1

Clevis type grab hook for chain shortening and basket lifting. When hooking the GGA into a chain, the working load limits (WLL) are 80% of the values shown in below table.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | Weight (kg) |
|--------------|---------|---------------------|-----------------|------|-------------|
| | | | L | B | |
| GGA-6-10 | 1.5 | 6 | 54 | 8 | 0.2 |
| GGA-8-10 | 2.6 | 8 | 56 | 10.5 | 0.4 |
| GGA-10-10 | 4.0 | 10 | 76 | 12 | 0.9 |
| GGA-13-10 | 6.8 | 13 | 97 | 16 | 1.7 |
| GGA-16-10 | 10.3 | 16 | 113 | 20 | 3.1 |
| GGA-20-10 | 16.0 | 20 | 147 | 26 | 7.0 |

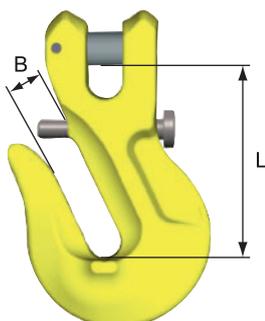


GGAL Grab Hook with Pin

Safety factor 4:1

Grab hook with locking pin, preventing chain from falling off. Used for chain shortening and basket lifting. When hooking the GGAL into a chain, the working load limits (WLL) are 80% of the values shown in below table.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | Weight (kg) |
|--------------|---------|---------------------|-----------------|------|-------------|
| | | | L | B | |
| GGAL-6-10 | 1.5 | 6 | 54 | 8 | 0.3 |
| GGAL-8-10 | 2.6 | 8 | 56 | 10.5 | 0.4 |
| GGAL-10-10 | 4.0 | 10 | 76 | 12 | 0.9 |
| GGAL-13-10 | 6.8 | 13 | 97 | 16 | 1.9 |
| GGAL-16-10 | 10.3 | 16 | 113 | 20 | 3.2 |
| GGAL-20-10 | 16.0 | 20 | 147 | 26 | 7.3 |

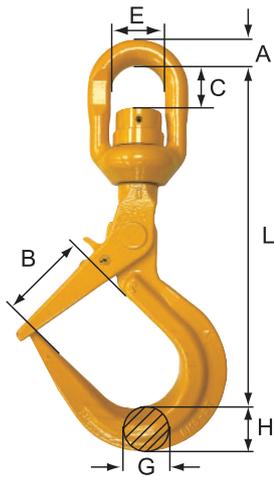

BMS Big Mouth Swivel Hook (for iron plates) Safety factor 5:1

| Product Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|----|----|----|----|----|-------------|
| | | L | B | E | C | A | G | H | |
| BMS-3 | 3.0 | 302 | 75 | 46 | 39 | 20 | 30 | 32 | 4.2 |

Advantage 1: Built-in bearing that greatly improves safety and workability!

- The rotation function prevents twisting of wires or chains and puts no strain on the sling.
- It prevents the iron plate from rotating when lifting, contributing to work safety.
- Smooth rotation is possible even while the iron plate is lifted, making positioning work easier.


Advantage 2: Design and functionality that make lifting work easy!

- Large hook opening and a thin tip, making it easy to attach it to holes in the iron plate.
- Reinforced latch spring which keeps the latch open while attaching load.



* When lifting, always make sure the latch is locked.

Other Accessories


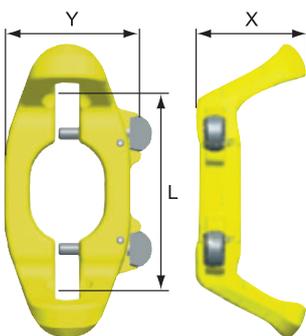


MIG Midgrab Chain Shortener

Safety factor 4:1


Allows adjusting of the length on any part of the chain.


| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|-----|-------------|
| | | | L | X | Y | |
| MIG-8-10 | 2.6 | 8 | 90.5 | 53 | 66 | 0.7 |
| MIG-10-10 | 4.0 | 10 | 113 | 62 | 78 | 1.1 |
| MIG-13-10 | 6.8 | 13 | 147 | 88 | 100 | 2.6 |

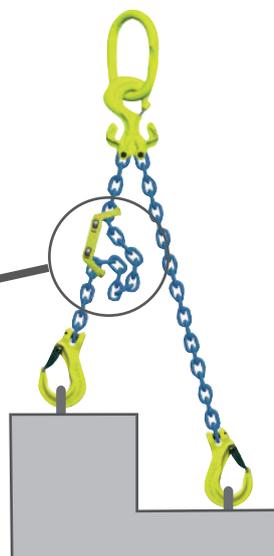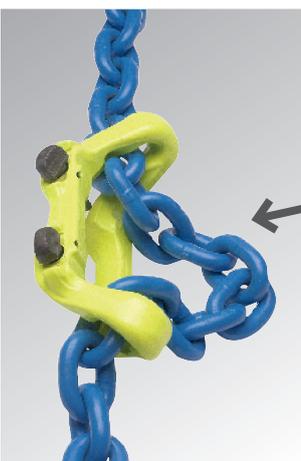

MIG-C Locking Set

Spring lock for chain adjusted with MIG.

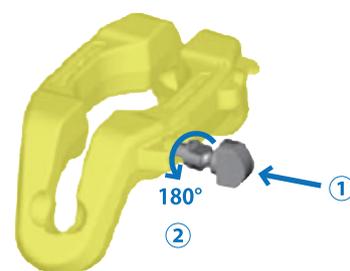

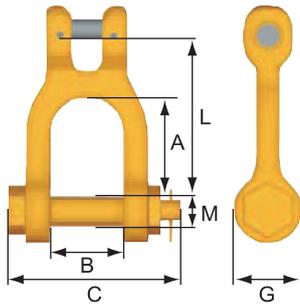


GSA Clevis Shackle

Safety factor 4:1

Fitting with a shackle that allows connecting the end of a chain to another lifting component. Ideal for connecting clamps and other lifting products.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|-----|----|-----|----|-------------|
| | | | A | B | C | G | L | M | |
| GSA-7/8-8 | 2.0 | 8 | 36 | 32 | 79 | 34 | 60 | 16 | 0.5 |
| GSA-10-8 | 3.2 | 10 | 48 | 34 | 93 | 40 | 80 | 20 | 0.9 |
| GSA-13-8 | 5.4 | 13 | 65 | 50 | 118 | 44 | 98 | 22 | 1.7 |
| GSA-16-8 | 8.2 | 16 | 70 | 60 | 141 | 54 | 114 | 27 | 3.0 |

Special Purpose Hooks


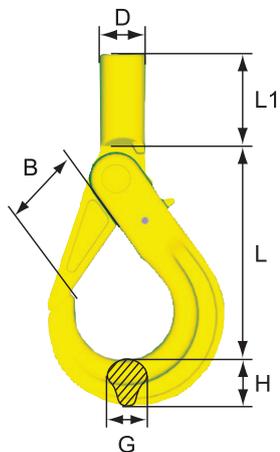


BKT Shank Safety Hook

Safety factor 4:1

This hook can be directly connected to an overhead crane or chain hoist. The shank section (L1) will be machined to fit the hoist currently in use. We also offer machining services.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|----|----|----|----|-------------|
| | | L | B | L1 | D | G | H | |
| BKT-6-10 | 1.5 | 89 | 29 | 39 | 20 | 15 | 21 | 0.5 |
| BKT-7/8-10 | 2.6 | 111 | 37 | 47 | 24 | 17 | 25 | 0.9 |
| BKT-10-10 | 4.0 | 133 | 45 | 51 | 29 | 21 | 30 | 1.6 |
| BKT-13-10 | 6.8 | 170 | 55 | 65 | 34 | 30 | 39 | 3.2 |

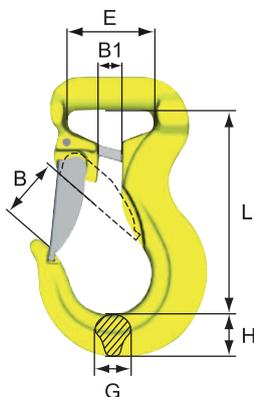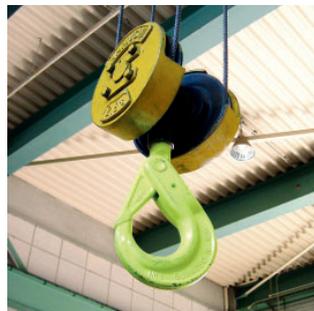


RH Polyester Sling Hook

Safety factor 4:1

Sling hook that can be easily attached to soft slings. When choke lifting, there is no need to remove the soft sling from the crane and thread it through, allowing to work with just one touch.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|----|----|----|----|-------------|
| | | L | B | B1 | E | G | H | |
| RH-1-10 | 1.0 | 84 | 24 | 8 | 35 | 17 | 19 | 0.4 |
| RH-2-10 | 2.0 | 96 | 28 | 11 | 40 | 17 | 22 | 0.7 |
| RH-3-10 | 3.0 | 117 | 33 | 12 | 47 | 24 | 30 | 1.4 |



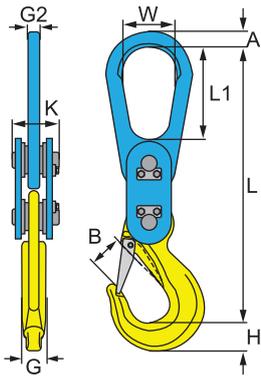


MI Insulated Hook

Safety factor 5:1

Resistance: 1000 V (without radio interference prevention function)

The built-in insulation allows safe positioning welding while the workpiece is suspended, preventing crane wire breakages and motor burnouts. Equipped with a high-quality sling hook made in Sweden.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|-----|-----|----|----|----|----|-----|-------------|
| | | W | A | L1 | L | B | H | G2 | G | K | |
| MI-3 | 3.0 | 80 | 22 | 150 | 428 | 42 | 38 | 19 | 28 | 86 | 6.8 |
| MI-5 | 5.0 | 96 | 30 | 170 | 506 | 52 | 47 | 22 | 36 | 100 | 12.3 |
| MI-10 | 10.0 | 110 | 40 | 200 | 664 | 73 | 67 | 28 | 43 | 130 | 28.5 |
| MI-15 | 15.0 | 150 | 42 | 250 | 748 | 82 | 75 | 32 | 51 | 130 | 37.1 |

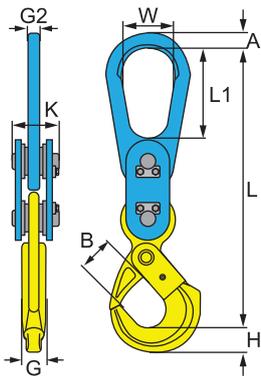


MI-B Insulated Hook

Safety factor 5:1


Resistance: 1000 V (without radio interference prevention function)


The built-in insulation allows safe positioning welding while the workpiece is suspended, preventing crane wire breakages and motor burnouts. Equipped with a high-quality safety hook made in Sweden.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|-----|-----|-----|----|----|----|-----|-------------|
| | | W | A | L1 | L | B | H | G2 | G | K | |
| MI-3B | 3.0 | 80 | 22 | 150 | 469 | 55 | 39 | 19 | 30 | 86 | 7.8 |
| MI-5B | 5.0 | 96 | 30 | 170 | 557 | 62 | 48 | 22 | 37 | 100 | 14.0 |
| MI-10B | 10.0 | 110 | 40 | 200 | 712 | 80 | 62 | 28 | 50 | 130 | 31.4 |
| MI-15B | 15.0 | 150 | 42 | 250 | 779 | 100 | 68 | 32 | 54 | 130 | 41.4 |

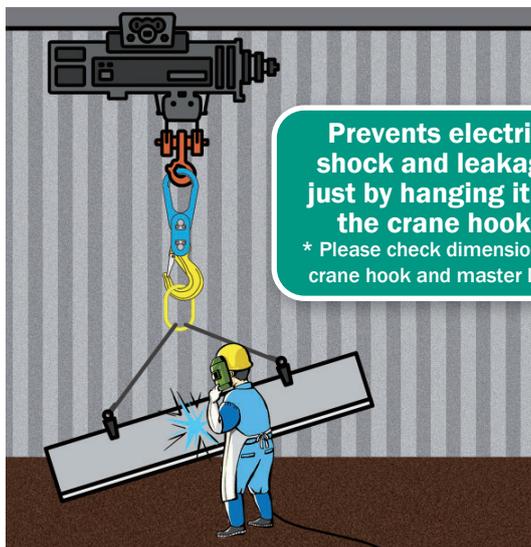

Japan's first 15-ton insulated hook

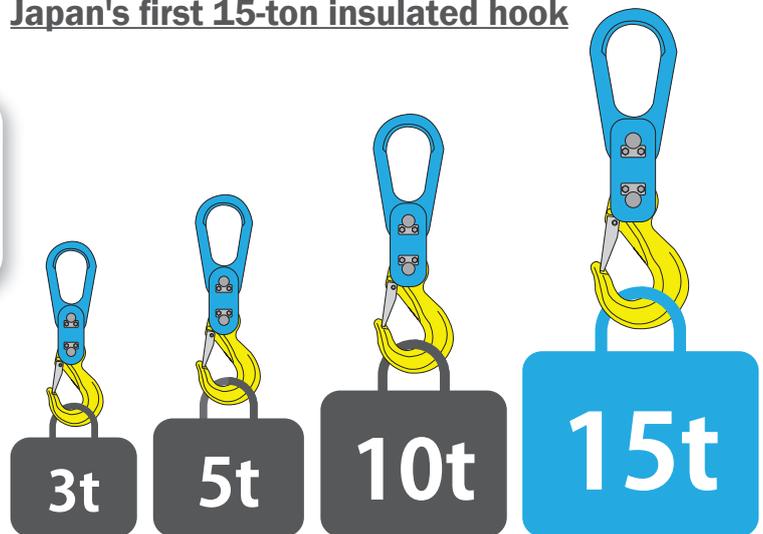

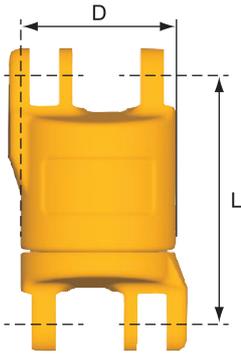

Swivel + Insulation

SKLI Insulated Swivel

Safety factor 4:1

Resistance: 1000 V (without radio interference prevention function)

Roller bearing swivel with SK connection, achieves smooth rotation even under load, allowing safe lifting operation. Thanks to its special structure the SKLI is lightweight and compact. It has a built-in insulation section made of special resin, reducing the possibility of insulation failures when using the SKLI over a long period of time.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | Weight (kg) |
|--------------|---------|---------------------|-----------------|-----|-------------|
| | | | L | D | |
| SKLI-7/8-8 | 2.0 | 8 | 76 | 48 | 0.7 |
| SKLI-10-8 | 3.2 | 10 | 97 | 59 | 1.3 |
| SKLI-13-8 | 5.4 | 13 | 120 | 75 | 2.8 |
| SKLI-16-8 | 8.0 | 16 | 137 | 90 | 4.6 |
| SKLI-18/20-8 | 12.8 | 20 | 159 | 104 | 7.3 |

* Use temperature: -30°C to 80°C ** SKA locking set sold separately.

Insulated Swivel Assembly


Safety factor 4:1

1000 V resistance, so welding can be done safely while the workpiece is suspended.


If welding is performed while the workpiece is suspended by an overhead crane or electric chain block, electric current may reach the crane through the wire or chain, which may lead to serious accidents such as wire breakage due to heat, deterioration of the chain, and motor burnout. An assembly of SK system components including the SKLI swivel prevents such accidents.

Assembly Example

Type: O-LI-N

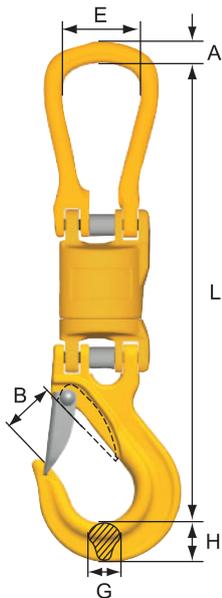

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | | | Weight (kg) |
|----------------|---------|---------------------|-----------------|----|-----|------|----|----|-------------|
| | | | L | B | E | A | G | H | |
| O-LI-N-7/8-8 | 2.0 | 8 | 265 | 27 | 50 | 14.5 | 18 | 21 | 1.5 |
| O-LI-N-10-8 | 3.2 | 10 | 339 | 34 | 66 | 19 | 23 | 29 | 2.8 |
| O-LI-N-13-8 | 5.4 | 13 | 410 | 42 | 72 | 22 | 28 | 36 | 5.8 |
| O-LI-N-16-8 | 8.0 | 16 | 490 | 53 | 82 | 25 | 34 | 43 | 10.0 |
| O-LI-N-18/20-8 | 12.8 | 20 | 560 | 59 | 105 | 35.5 | 41 | 51 | 15.5 |

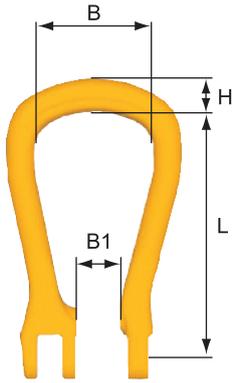


SKO Open Link

Safety factor 4:1

This link can be used with any type of sling, including chains, wire slings, belt slings, etc.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|-----|------|----|-------------|
| | | | L | B | H | B1 | |
| SKO-7/8-8 | 2.0 | 8 | 99 | 50 | 14.5 | 15 | 0.3 |
| SKO-10-8 | 3.2 | 10 | 127 | 66 | 19 | 20 | 0.6 |
| SKO-13-8 | 5.4 | 13 | 145 | 72 | 22 | 25 | 1.0 |
| SKO-16-8 | 8.2 | 16 | 175 | 82 | 25 | 30 | 1.6 |
| SKO-18/20-8 | 12.8 | 20 | 204 | 105 | 35.5 | 36 | 2.6 |

* SKA locking set sold separately.

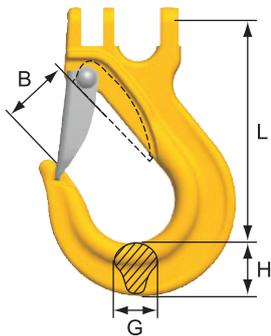


SKN/ESKN Sling Hook

Safety factor 4:1

Sling hook with latch and wide opening. Suitable for a wide range of loads.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|-------------|
| | | | L | B | G | H | |
| SKN-7/8-8 | 2.0 | 8 | 90 | 27 | 18 | 21 | 0.4 |
| SKN-10-8 | 3.2 | 10 | 115 | 34 | 23 | 29 | 0.8 |
| ESKN-13-8 | 5.4 | 13 | 145 | 42 | 27 | 36 | 1.8 |
| ESKN-16-8 | 8.2 | 16 | 178 | 52 | 36 | 43 | 3.5 |
| ESKN-18/20-8 | 12.8 | 20 | 197 | 54 | 41 | 51 | 5.0 |

* SKA locking set sold separately.

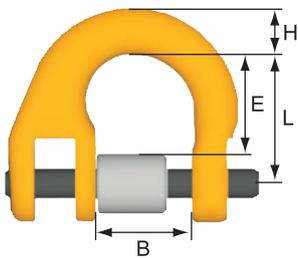

SKT Half Link Set


Safety factor 4:1

Used to connect chains or wires to SK system components.

Pin collar with helical spring, allowing for repeated attachment and detachment.

| Product Code | WLL (t) | Chain Diameter (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|------|-------------|
| | | | L | B | E | H | |
| SKT-7/8-8 | 2.0 | 8 | 28 | 18 | 22 | 11 | 0.1 |
| SKT-10-8 | 3.2 | 10 | 34 | 25 | 26 | 13 | 0.2 |
| SKT-13-8 | 5.4 | 13 | 44 | 29 | 33 | 16.5 | 0.4 |
| SKT-16-8 | 8.2 | 16 | 52 | 36 | 40 | 20 | 0.7 |
| SKT-18/20-8 | 12.8 | 20 | 63 | 43 | 48 | 23 | 1.1 |

* SKA locking set included.

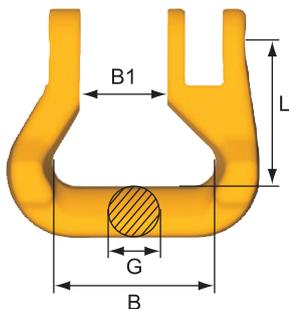

SKR Polyester Sling Coupling

Safety factor 4:1

Coupling for polyester slings like round slings.

| Product Code | WLL (t) | Dimensions (mm) | | | | Weight (kg) |
|--------------|---------|-----------------|----|----|----|-------------|
| | | L | B | B1 | G | |
| SKR-7/8-8 | 2.0 | 35 | 40 | 18 | 24 | 0.2 |
| SKR-10-8 | 3.2 | 42 | 47 | 25 | 29 | 0.4 |
| SKR-13-8 | 5.4 | 49 | 53 | 29 | 35 | 0.7 |
| SKR-16-8 | 8.2 | 62 | 67 | 35 | 43 | 1.2 |
| SKR-18/20-8 | 12.8 | 71 | 80 | 43 | 52 | 1.9 |

* SKA locking set sold separately.

CLS Clevis Pin Set

Pin for connecting chain to accessories



| Size | d (mm) |
|--------|--------|
| CLS-6 | 8.0 |
| CLS-8 | 10.4 |
| CLS-10 | 13.0 |
| CLS-13 | 17.0 |
| CLS-16 | 20.8 |
| CLS-20 | 25.0 |

BK Trigger Set

For BK, BKL, BKLK, BKG, BKT



Size:
BK-6
BK-7/8
BK-10
BK-13
BK-16
BK-18/20
BK-22
BK-26

Long trigger sets also available. Please contact us.

EKN Spare Latch Set

For EKN, LKNK, EGKNA, ESKN



Size:
EKN-6
EKN-7/8
EKN-10
EKN-13
EKN-16
EKN-18/20
EKN-22
EKN-26
EKN-32

* EKN-22 to EKN-32 are bolt-type pins

SKAA Locking Set

For GA



| Size | d (mm) |
|---------|--------|
| SKAA-6 | 4.8 |
| SKAA-8 | 6.2 |
| SKAA-10 | 8.0 |
| SKAA-13 | 10.0 |
| SKAA-16 | 12.3 |
| SKAA-20 | 15.2 |
| SKAA-22 | 18.0 |
| SKAA-26 | 21.0 |
| SKAA-32 | 25.0 |

BK Long Trigger Set

For BK



Size:
BK-32

SKN Spare Latch Set

For SKN



Size:
SKN-7/8
SKN-10

SKA Locking Set

For G, SK System



| Size | d (mm) |
|-----------|--------|
| SKA-7/8 | 6.2 |
| SKA-10 | 8.0 |
| SKA-13 | 10.0 |
| SKA-16 | 12.3 |
| SKA-18/20 | 15.0 |
| SKA-22 | 17.0 |
| SKA-26 | 20.0 |
| SKA-32 | 24.0 |

OBK Trigger Set

For OBK, LBK, LKBK, GBK



Size:
OBK-6
OBK-7/8
OBK-10
OBK-13
OBK-16
OBK-18/20
OBK-22

RH Spare Latch Set


For RH



Size:
RH-1
RH-2
RH-3

BLA Spare Pin Set

For GKL, GSA



| Size | d (mm) |
|---------|--------|
| BLA-6 | 7.5 |
| BLA-7/8 | 9.5 |
| BLA-10 | 11.8 |
| BLA-13 | 15.7 |
| BLA-16 | 19.4 |

BMS Trigger Set

For BMS



Size:
BMS-3

MIG-C Locking Set

For MIG



Size:
MIG-C-8
MIG-C-10
MIG-C-13

CS Retaining Pin Set

For CG, CGD, CL, CLD, RH



Size:
CS-6
CS-8
CS-10
CS-13
CS-16

For information on how to replace spare triggers, pins, latches and other parts, please contact us.

<https://www.siammartec.co.th>



1. Lifting Work


Lifting shall be performed by a qualified person in accordance with Articles 221 and 222 of the Japanese Crane Safety Regulations or corresponding safety regulations in your country.

Incorrect use

Do not do any of the following under any circumstances as it may lead to a serious accidents.



Using twisted or tangled chain

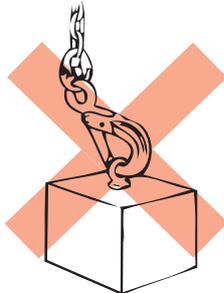

Lifting with the tip of the hook



Lifting with the tip of the hook



Lifting while load hits the hook



Putting your fingers inside the hook while lifting

2. Use Temperature Range of Chain Slings

Within -40°C to 200°C chain slings can be used within the working load limit range.

Chain slings cannot be used in ambient temperatures above 200°C.

3. Use in Acidic Atmospheres

Avoid using chain slings and metal fittings in acidic atmospheres.


4. Plating of Chains and Accessories

Never plate chains and accessories after purchase, as this may reduce their performance.

Please contact us for anti-rust treatment.

5. Basket and Choke Lifting

If the load angle is sharp, the chain strength will decrease. Use corner pads or other pads to ensure that the radius R of the load is at least twice the chain diameter.

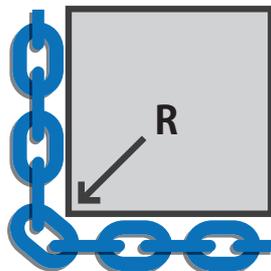

Inspection Standard for KLA Chains and Lifting Accessories

For details, please refer to the separate inspection standards issued by our company.

Lifting equipment must be inspected to keep it safe for use. The service limit of lifting equipment varies depending on the frequency of use, the lifting method, the weight of the load carried per lift, the shape of the load, etc. The more the equipment is used, the sooner it is damaged and its strength decreases. Therefore, in addition to daily inspections, it must be inspected periodically according to the actual work. Defective items must be replaced or repaired to prevent accidents.

The Crane Safety Regulations in Japan state that "When performing lifting work with a crane, mobile crane, or derrick, the lifting equipment to be used must be inspected for abnormalities before starting work that day. If an abnormality is found during inspection, it must be repaired immediately." If an item is found to be prohibited from use as a result of inspection, it must be removed from service and disposed of so that it will not be used again. It is necessary to establish inspection standards for lifting equipment, and when carrying out inspections on a regular basis, to define compliance signs for the inspection results – wrap colored vinyl tape around the equipment, attach stickers, and also to manage the history using record cards.

Please contact us for further information.

Component Inspection Rules (Examples)

| Component | Check | Method | Disposal Criteria |
|----------------------|--|-------------------|---|
| Chain KLA | Wear | Caliper Measuring | 10% or more of original dimension of chain diameter D |
| | Elongation | Caliper | 5% or more of original dimension L of 5 links |
| | Deformation | Visual Check | Bends, twists |
| | Corrosion | Visual Check | Severe corrosion |
| | Cracks | Visual Check | Any kind of crack |
| | * When using chain for wrap lifting (choke, basket), carefully inspect the parts that come into contact with the load. | | |

| Component | Check | Method | Disposal Criteria |
|----------------------------|--------------|------------------------|---|
| Master Link MGD | Wear | Caliper | H: 5% or more e': 5% or more d': 3% or more |
| | Elongation | Caliper Measuring | L1: 5% or more |
| | Deformation | Caliper Measuring | C, C': 5% or more |
| | | Visual Check | Bends, twists |
| | Visual Check | Bends, abrasion of pin | |
| | Corrosion | Visual Check | Severe corrosion |
| Cracks | Visual Check | Any kind of crack | |

| Component | Check | Method | Disposal Criteria |
|------------------------|-------------|-------------------|--|
| Coupling GA | Wear | Caliper Measuring | H, H': 5% or more d: 5% or more e: 5% or more |
| | Deformation | Visual Check | Elongation, twists, other deformations |
| | Moveability | Visual Check | Collar does not rotate, poor up and down link movement, severe corrosion |
| | Cracks | Visual Check | Any kind of crack |

| Component | Check | Method | Disposal Criteria |
|-----------------------------|--------------|----------------------|---|
| Sling Hook EGKNA | Wear | Caliper Measuring | d: 3% or more e: 5% or more H: 5% or more |
| | Deformation | Caliper Measuring | B: 5% or more |
| | | Visual Check | Bends, twists of hook |
| | Visual Check | Bends, twists of pin | |
| | Corrosion | Visual Check | Severe corrosion |
| Cracks | Visual Check | Any kind of crack | |

* If the latch stands straight up, discard it.

Please contact us for inspection and disposal standards.

For chain inspection, inspection gauges are available as optional products.

for 6 mm to 16 mm

for 20 mm and 22 mm
for 26 mm and 32 mm

Elongation check


Wear check

Safety factor 5:1

UKN Bucket Hook

This product holds the No. 1 market share for hydraulic excavator bucket hooks in Japan. The UKN is robust and easy to use, with proven reliability through a long track record.

- It has a latch with lugs that makes it easy to attach and release load.
- Even if a load is placed on the latch, the UKN withstands the working load limit (WLL).
- All products are strength tested (3 times the WLL) before shipping from the factory.

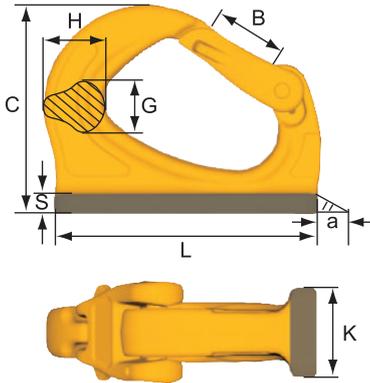

| Product Code | Applicable Bucket Capacity (m ³) | WLL (t) | Dimensions (mm) | | | | | | | | Weight (kg) |
|--------------|--|---------|-----------------|----|-----|----|------|----|------|----|-------------|
| | | | a | B | C | G | H | K | L | S | |
| UKN-0.75 | - 0.07 | 0.75 | 4 | 18 | 56 | 13 | 20 | 19 | 81.5 | 6 | 0.3 |
| UKN-1 | 0.07 - 0.2 | 1.0 | 5 | 20 | 72 | 17 | 25 | 25 | 95 | 6 | 0.6 |
| UKN-2 | 0.2 - 0.25 | 2.0 | 7 | 25 | 86 | 20 | 30 | 30 | 114 | 8 | 0.9 |
| UKN-3 | 0.25 - 0.3 | 3.0 | 8 | 30 | 105 | 24 | 31.5 | 35 | 132 | 10 | 1.5 |
| UKN-4 | 0.3 - 0.5 | 4.0 | 10 | 30 | 113 | 29 | 38 | 42 | 140 | 11 | 2.0 |
| UKN-5 | 0.5 - 0.6 | 5.0 | 11 | 34 | 131 | 30 | 47 | 45 | 165 | 12 | 2.8 |
| UKN-8 | 0.6 - 0.8 | 8.0 | 12 | 34 | 133 | 40 | 51 | 50 | 172 | 13 | 3.5 |
| UKN-10 | 0.8 - 1.0 | 10.0 | 12 | 47 | 170 | 43 | 58 | 55 | 220 | 14 | 6.4 |
| UKN-15 | 1.0 - | 15.0 | 17 | 55 | 188 | 50 | 67 | 60 | 240 | 15 | 9.0 |

⚠️ Precautions when using bucket hooks for lifting

- When using the UKN, strictly adhere to Article 164 of the Japanese Industrial Safety and Health Regulations and Labor Standards Bureau Notification No. 542 or corresponding safety regulations in your country.

- The maximum lifting load can be calculated using the following formula.

$$\text{Bucket capacity (m}^3\text{)} \times 1800 \text{ (kg/m}^3\text{)}$$

- Caution: Even if the calculated maximum load of a hydraulic excavator is 1 ton or more, it is mandatory to use a load of less than 1 ton.
- Lifting work shall be performed only by trainers for lifting work or persons who have completed a special training.

UKN Spare Latch Set



- Size:
- UKN-0.75
 - UKN-1
 - UKN-2
 - UKN-3
 - UKN-4
 - UKN-5
 - UKN-8
 - UKN-10
 - UKN-15

KURUKURU Anti Twist Set

Safety factor 4:1

When attached to a bucket hook, it smoothly reduces twisting. It can untwist chains and wires and helps positioning the load.



| Size | WLL (t) | L (mm) | Hook Opening B (mm) | Weight (kg) |
|------|---------|--------|---------------------|-------------|
| S | 2.0 | 310 | 37 | 1.6 |
| M | 3.2 | 379 | 45 | 2.8 |
| L | 5.4 | 469 | 55 | 5.4 |
| LL | 8.2 | 566 | 62 | 9.5 |


- The bearing swivel hook allows smooth rotation, even when under load.
- The outward-opening hook makes it easy to attach and detach wide slings such as belt slings.
- The hook has a highly safe locking function, preventing slings from falling off during lifting.



Safety factor 5:1

AH Automatic Hook ** Please check availability.*

At sites, where space and manpower are limited and lifted loads need to be released smoothly, this automatic hook is a safe and convenient solution. It allows engaging and releasing of loads simply through crane operation.

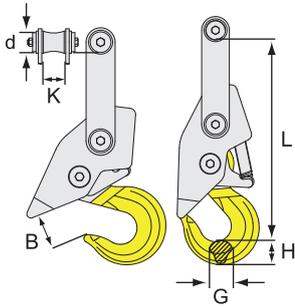

| Product Code | WLL (t) | Min Lock Load (kgf) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|---------------------|-----------------|----|----|----|------|----|-------------|
| | | | L | B | G | H | K | ød | |
| AH-16 | 1.6 | 20 | 296 | 50 | 21 | 26 | 61 | 20 | 4.4 |
| AH-42 | 4.2 | 80 | 412 | 53 | 28 | 38 | 61 | 33 | 9.6 |
| AH-80 | 8.0 | 200 | 514 | 88 | 42 | 59 | 62.5 | 48 | 20.4 |


How to use the AH Hook



1. The hook engages with the load.



2. The load is lifted, the hook locks, preventing load from falling.

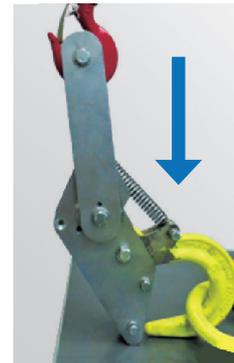

3. When the load is lowered, the hook lands and tilts.



4. The crane is raised, the load release is completed.




Watch video of the AH Hook on YouTube.

TH Auto Hook ** Please check availability.*


Safety factor 5:1

The TH is a safe and convenient hook, which allows releasing of loads simply through crane operation. Ideal for unloading in narrow places or heights.

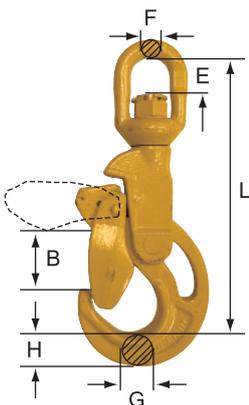


| Product Code | WLL (t) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|-----------------|----|----|----|----|----|-------------|
| | | L | B | G | H | F | E | |
| TH-13-8S | 4.2 | 330 | 60 | 32 | 43 | 20 | 41 | 5.5 |


How to use the TH Hook

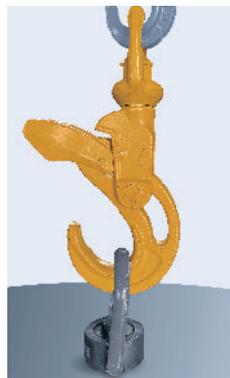


1. Attaching load to the hook, closing the latch.

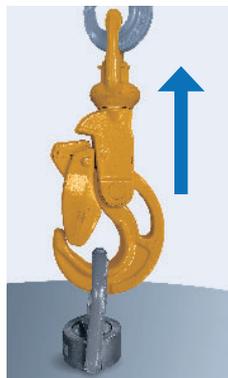

2. The load is lifted.

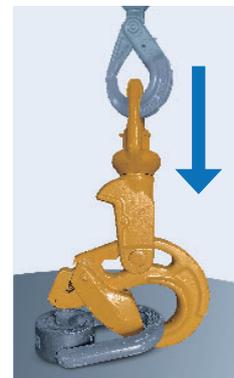

3. When the load is lowered, the hook lands and tilts.

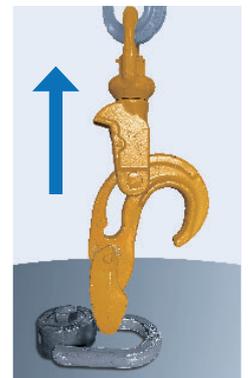

4. The crane is raised, the hook flips over, load release is completed.




Watch video of the TH Hook on YouTube.

Safety factor 5:1

CBM Balance Master * Please check availability.


Chain sling set that allows perfect balancing of loads.
Recommended for lifting of asymmetric objects.

- Balancing the load through crane operation, improving work efficiency.
- The chain locks at the center of gravity – safe, non-slipping design.
- No need to keep different chain slings for asymmetric loads.

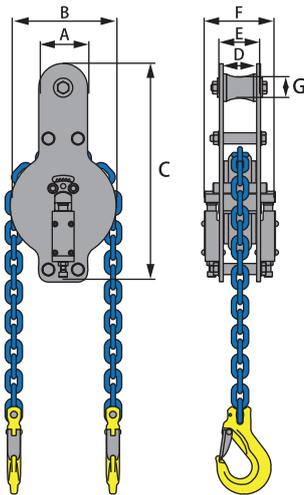

| Product Code | Hook | WLL (t) | Chain Diameter (mm) | Chain Length (m)* | Dimensions (mm) | | | | | | | Set Weight (kg) |
|--------------|------|---------|---------------------|-------------------|-----------------|-----|-----|----|----|-----|----|-----------------|
| | | | | | A | B | C | D | E | F | G | |
| CBM-EGKNA-8 | | 2.0 | 8 | 4 | 76 | 165 | 343 | 52 | 64 | 110 | 33 | 16.4 |
| CBM-EGKNA-10 | | 3.0 | 10 | 4 | 90 | 220 | 425 | 62 | 74 | 132 | 33 | 28.3 |
| CBM-EGKNA-13 | | 5.0 | 13 | 4 | 90 | 228 | 472 | 62 | 74 | 132 | 33 | 36.6 |
| CBM-GBK-8 | | 2.0 | 8 | 4 | 76 | 165 | 343 | 52 | 64 | 110 | 33 | 17.0 |
| CBM-GBK-10 | | 3.0 | 10 | 4 | 90 | 220 | 425 | 62 | 74 | 132 | 33 | 28.9 |
| CBM-GBK-13 | | 5.0 | 13 | 4 | 90 | 228 | 472 | 62 | 74 | 132 | 33 | 38.0 |

* 4 m is the total chain length, not the lifting height. Other chain lengths available on request.

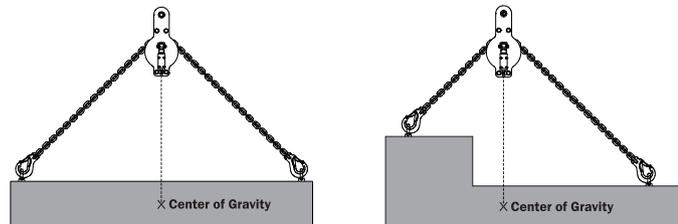


Watch video of Balance Master on YouTube.

Roller Bearing Swivels * Please check availability.

Safety factor 5:1


For lifting of heavy objects. Please contact us for detailed information.

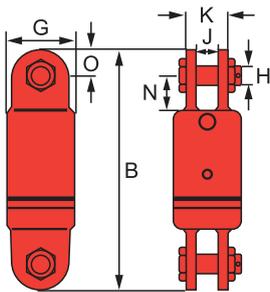

S-2 Jaw & Jaw

Specifications with hooks are also available. Please contact us for details.


| Product Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|--------------|---------|-----------------|-----|------|------|------|------|------|-------------|
| | | B | G | H | J | K | N | O | |
| 3-S-2 | 3.0 | 236 | 70 | 19.1 | 22.4 | 41.1 | 33.3 | 25.4 | 4.4 |
| 5-S-2 | 5.0 | 262 | 76 | 22.4 | 25.4 | 57 | 41.1 | 28.4 | 6.2 |
| 8-S-2 | 8.5 | 321 | 102 | 25.4 | 39.5 | 71.5 | 54 | 35.1 | 11.9 |
| 10-S-2 | 10.0 | 426 | 114 | 38.1 | 44.5 | 86 | 89 | 44.5 | 20.8 |
| 15-S-2 | 15.0 | 435 | 127 | 38.1 | 44.5 | 86 | 89 | 44.5 | 28.5 |
| 25-S-2 | 25.0 | 527 | 152 | 51 | 51 | 117 | 93.5 | 60.5 | 64.0 |
| 35-S-2 | 35.0 | 527 | 165 | 51 | 51 | 117 | 93.5 | 60.5 | 70.0 |
| 45-S-2 | 45.0 | 641 | 178 | 57 | 63.5 | 127 | 102 | 76 | 107.0 |

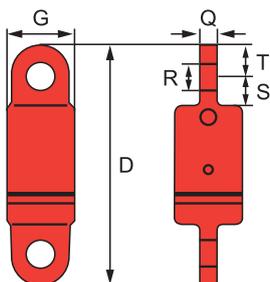

S-5 Eye & Eye

Specifications with hooks are also available. Please contact us for details.

| Product Code | WLL (t) | Dimensions (mm) | | | | | | Weight (kg) |
|--------------|---------|-----------------|-----|------|------|------|------|-------------|
| | | D | G | Q | R | S | T | |
| 3-S-5 | 3.0 | 239 | 70 | 19.1 | 26.2 | 28.4 | 31.8 | 3.9 |
| 5-S-5 | 5.0 | 249 | 76 | 25.4 | 32.5 | 31.8 | 31.8 | 5.1 |
| 8-S-5 | 8.5 | 302 | 102 | 31.8 | 35.8 | 41.1 | 38.1 | 13.3 |
| 10-S-5 | 10.0 | 394 | 114 | 42.9 | 42.9 | 70 | 47.8 | 19.1 |
| 15-S-5 | 15.0 | 416 | 127 | 49.3 | 51.5 | 70 | 54 | 22.2 |
| 25-S-5 | 25.0 | 565 | 152 | 57 | 58.5 | 98.5 | 60.5 | 59.0 |
| 35-S-5 | 35.0 | 565 | 165 | 57 | 58.5 | 98.5 | 60.5 | 66.0 |
| 45-S-5 | 45.0 | 673 | 178 | 63.5 | 64.5 | 102 | 76 | 98.0 |

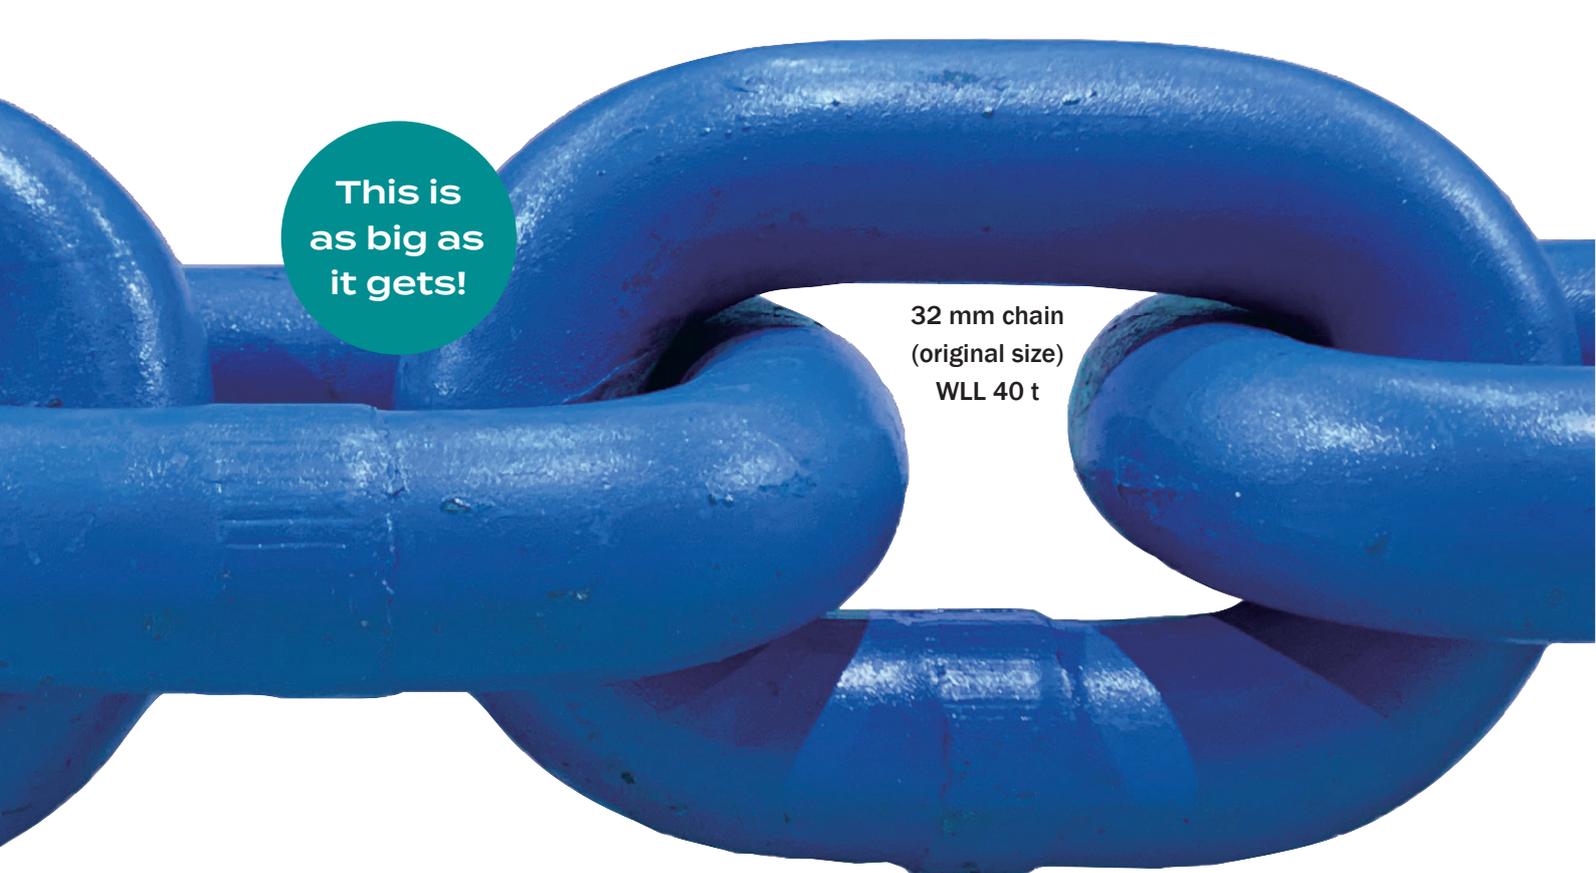

**This is
as big as
it gets!**

**32 mm chain
(original size)
WLL 40 t**



**For more Information about our products and
how to get in touch with us, please visit our website.
www.siammartec.co.th**

**For videos about high-end lifting products,
please check out our YouTube channel.
www.youtube.com/@MartecLiftingEquipment**



* When purchasing products, please read the enclosed instructions carefully before use.

** Catalogue issued February 2026. Specifications may change at any time without notice to improve product design and performance.



SIAM MARTEC SALES

SIAM MARTEC SALES Co., Ltd.

129/1 Moo 17 Soi Winner, Teparak Rd.

T. Bangsaothong, A. Bangsaothong

Samutprakam 10570, THAILAND

Tel: +66-(0)82-946-9542 / +66-(0)82-965-1924

E-mail: salescosms@gmail.com / LINE ID: 0829469542

Sales Partner: